



1


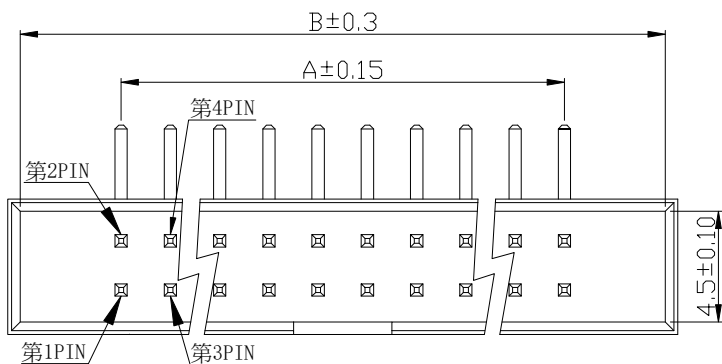


P. C. B Hole Layout

Specifications

Current Rating : 2 Amp
Insulator Resistance : 3000 Megohms Min.
Dielectric Withstanding : AC 500V
Operating Temperature : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Material : Copper Alloy
Insulator Material : Polyester, UL 94V-0
Standard : Nylon 9T
Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over
Note:
Duplex Plating: Gold Plated on contact area,
Tin on solder area

2

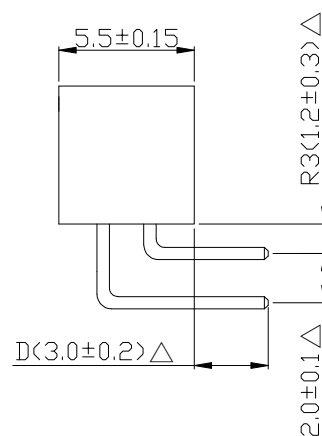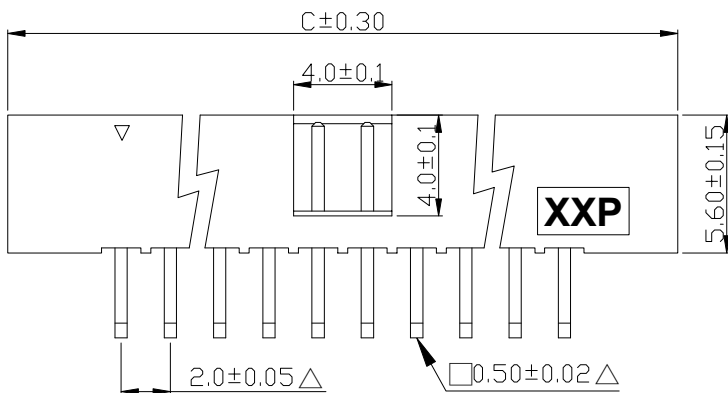

PIN NUMBER	A(mm)	B(mm)	C(mm)
10PIN	8.00	16.20	17.20
12PIN	10.00	18.20	19.20
14PIN	12.00	20.20	21.20
16PIN	14.00	22.20	23.20
18PIN	16.00	24.20	25.20
20PIN	18.00	26.20	27.20
24PIN	22.00	30.20	31.20
26PIN	24.00	32.20	33.20
30PIN	28.00	36.20	37.20
34PIN	32.00	40.20	41.20
40PIN	38.00	46.20	47.20
44PIN	42.00	50.20	51.20
50PIN	48.00	56.20	57.20
68PIN	66.00	74.20	75.20

3



CHERNG WEEI

CHERNG WEEI

DESCRIPTION(内容):

2.0mm Box Header H:5.6 W:5.5 90° $\square=0.50$
(RoHS)PART NO:
(料 號)

CHEB200R0XX

DWG NO(圖號):

DRAWN(製圖):

黃炳秋

CHECKED(確認):

黃炳秋


APPROVAL(核准):

黃炳秋

GENERAL TOLERANCE:
(公差).X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):

1:XX

REV:
A/1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

 Δ 此符號表示重點管控尺寸

DATE

2025.08.26

A

B

C

D

E

FILE NO: CWJ-4E-