

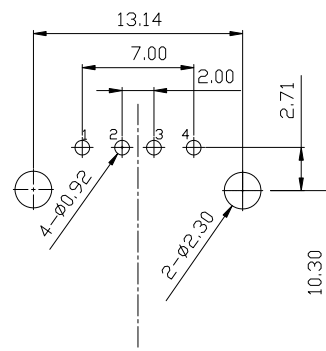
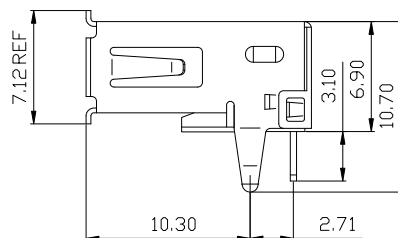
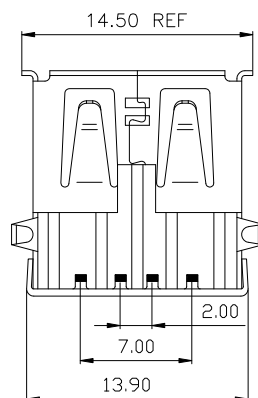




RECOMMENDED P.C.B. PATTERN LAYOUT



MATERIALS

HOUSING: PBT (UL 94V-0). COLOR: BLACK or WHITE

SHELL: COPPER ALLOY(C2680), NICKEL PLATING

TERMINAL: COPPER ALLOY(C2680), GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -25° C~+85° C

PIN NO	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

PART NO.	COLOR
UAF-041RGPB-CF1066	BLACK
UAF-041RGPW-CF1066	WHITE