





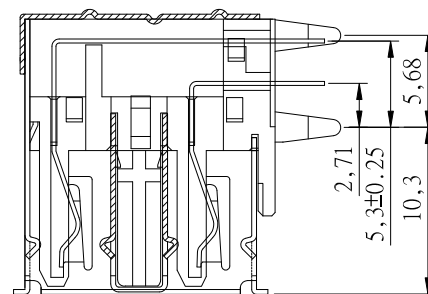

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	VBUS
2	D-	6	D-
3	D+	7	D+
4	GND	8	GND

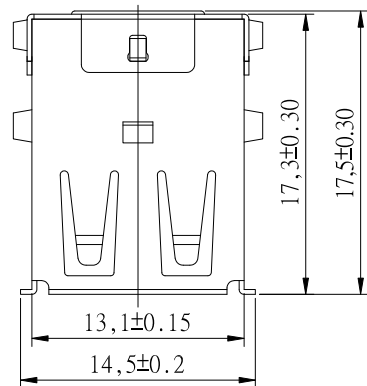

RECOMMENDED PCB LAYOUT
THICKNESS=2.0mm (TOLERANCES ±0.05)

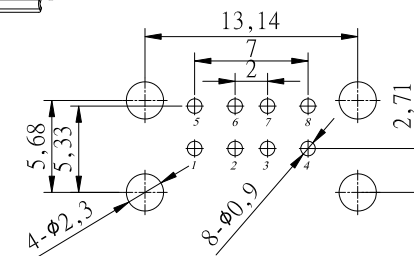

MATERIALS

HOUSING: PBT (UL 94V-0)
SHELL: SPCC-SD, NICKEL PLATING
TERMINAL: COPPER ALLOY/C2680, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

Part No:

UAF-042RGP X 1-CF1066

COLOR:
B:BLACK
W:WHITE



承洧科技股份有限公司
Chong Wei Technology Corp.

DESCRIPTION(內容):	DRAWN(製圖):
USB A TYPE, STACKED, PCB MOUNT, R/A, METAL SHIELD, FEMALE(RoHS)	HUANG
PART NO: (料號) UAF-042RGPX1-CF1066	CHECKED(確認):
DWG NO(圖號): 22CC-081T-115LX1	TERESA
	APPROVAL(核准):
	JOHNNY

GENERAL TOLERANCE: (公差)	REV: R1
.X ±0.30	UNIT: mm
.XX ±0.20	SIZE: A4
SCALE(比例):	SHEET: 1/1
FREE	

REV	DESCRIPTION	DATE
R0		2020.03.27
R1	圖面更新	2021.04.14
R2		
R3		