
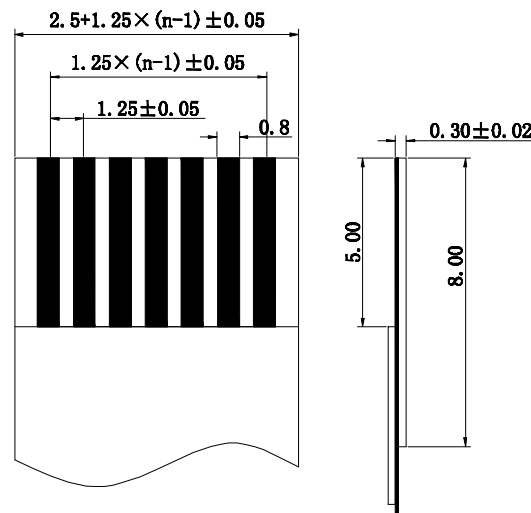




Electrical:
 Current Rating:1.0 A AC(rms)/DC
 Voltage Rating:50V AC(rms)/DC
 Contact resistance:40m Ohm Max
 Insulator resistance:800M ohm min.
 Withstanding Voltage:200V AC/Minute
 Operating Temperature Range:-40°~+85°C

Material And Finish:
 Housing:LCP
 Plating:Matte Tin plated

1

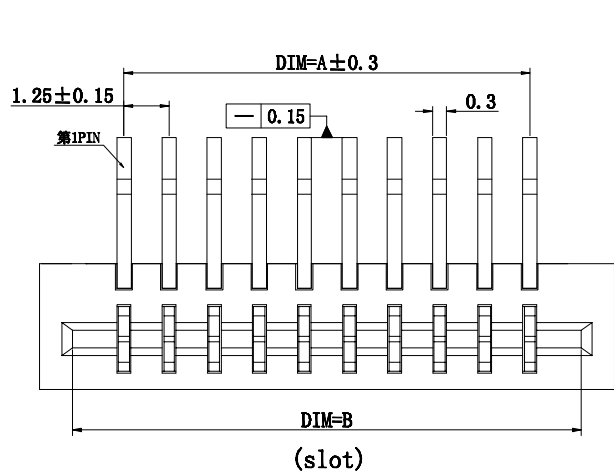

2

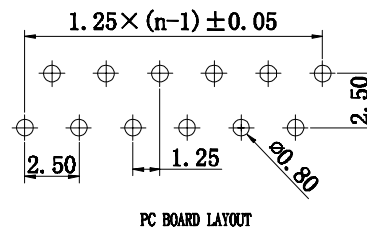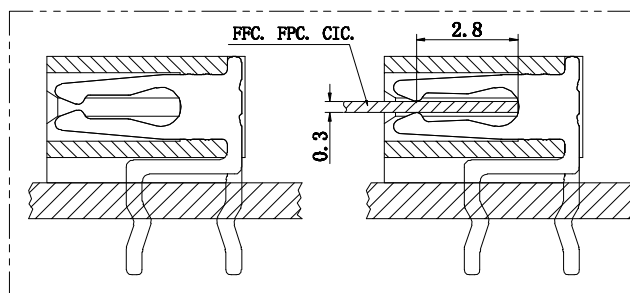

3

P 数	DIM=A	DIM=B	DIM=C
004	3.75	6.50	8.45
005	5.00	7.75	9.70
006	6.25	9.00	10.95
007	7.50	10.25	12.20
008	8.75	11.50	13.45
009	10.00	12.75	14.70
010	11.25	14.00	15.95
011	12.50	15.25	17.20
012	13.75	16.50	18.45
013	15.00	17.75	19.70
014	16.25	19.00	20.95
015	17.50	20.25	22.20
016	18.75	21.50	23.45
017	20.00	22.75	24.70
018	21.25	24.00	25.95
019	22.50	25.25	27.20
020	23.75	26.50	28.45
021	25.00	27.75	29.70
022	26.25	29.00	30.95
023	27.50	30.25	32.20
024	28.75	31.50	33.45
025	30.00	32.75	34.70
026	31.25	34.00	35.95
027	32.50	35.25	37.20
028	33.75	36.50	38.45
029	35.00	37.75	39.70
030	36.25	39.00	40.95
031	37.50	40.25	42.20
032	38.75	41.50	43.45
033	40.00	42.75	44.70



DESCRIPTION(内容):
FPC 1.25mm Right Angle(RoHS)
 PART NO:
 (料 號) FPC135N3XX-CTT-CF1337
 DWG NO(圖號): 103003-XX121-1

DRAWN(製圖):
ZHANG
 CHECKED(確認):
TERESA
 APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
 (公差)
 X. ±0.30 X' ±5.0'
 .X ±0.25 .X' ±3.0'
 .XX ±0.20 .XX' ±2.0'
 .XXX ±0.10
 SCALE(比例):
FREE

REV:
R0
 UNIT:
mm
 SIZE:
A4
 SHEET:
1/1

REV	DESCRIPTION	DATE
R0		2022.07.29
R1		
R2		
R3		

A

B

C

D

E