


RECOMMENDED P.C.B. LAYOUT (T:1.00mm)  
TOLERANCE UNSPECIFIED ±0.05mm



A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	CAP	LCP+30%GF	1	UL94V-0
5	SHRAPNEL	STAINLESS STEEL	1	
4	SHIELDING PLATE	STAINLESS STEEL	1	
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD 1U*/TIN
1	HOUSING	LCP+30%GF	1	UL94V-0
NO	PARTS	MATERIAL	QTY	FINISHING

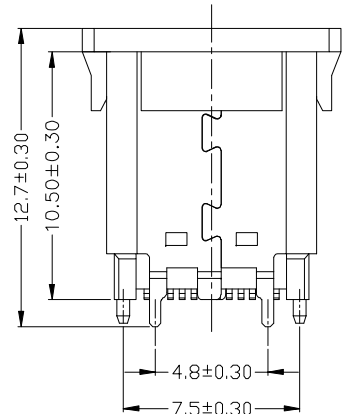

1

2

3



DESCRIPTION(內容):  
**USB TYPE CF 直立式SMT 長:10.5mm (RoHS)**

PART NO:  
(料 號) **UCF-241VGCB-CF646**

DWG NO(圖號): **USCF-241N-4BQ60**

DRAWN(製圖):  
**ZHNAG**

CHECKED(確認):  
**TERESA**

APPROVAL(核准):  
**JOHNNY**

GENERAL TOLERANCE:  
(公差)  
.X ±0.30 .X° ±1°  
.XX ±0.25  
.XXX ±0.15

SCALE(比例):  
**FREE**

REV:  
**R1**

UNIT:  
**mm**

SIZE:  
**A4**

SHEET:  
**1/1**

REV	DESCRIPTION	DATE
R0		2019.10.04
R1	更新圖面	2025.05.19
R2		
R3		

A

B

C

D

E