

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 50V AC/ max.

Operating Temp.: -25°C ~ +85°C


Insulation Resistance: 500MΩ/ min.

Dielectric Withstanding Voltage: 500V AC/ min.

Contact Resistance: 20mΩ/ max.

Material

Material: PBT, UL94V-0

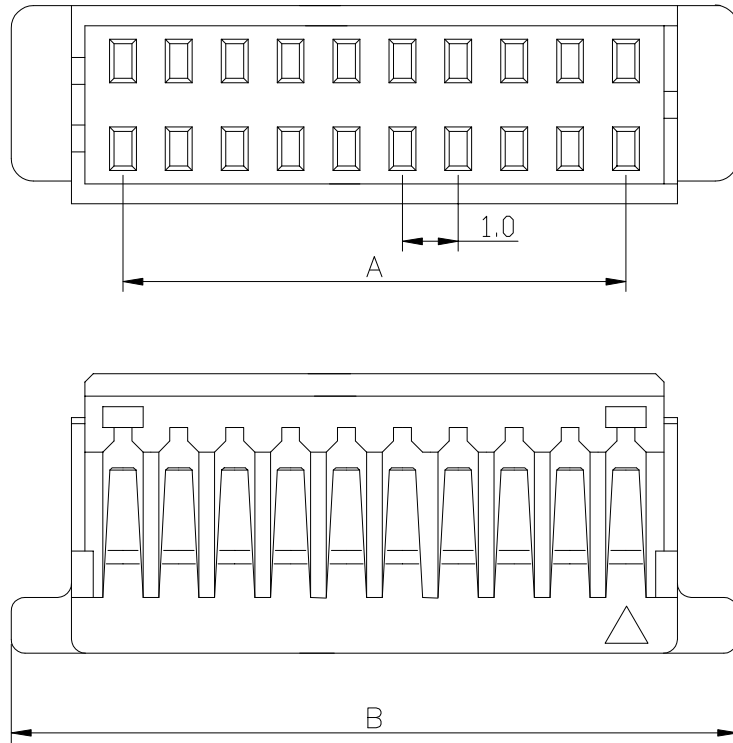

Poles	Dimension mm		Part No.	Note.
	A	B		
20	9.00	13.00	CSHD-H10-2X10	
30	14.00	18.00	CSHD-H10-2X15	
40	19.00	23.00	CSHD-H10-2X20	
50	24.00	28.00	CSHD-H10-2X25	



承洧科技股份有限公司
Cherg Weei Technology Corp.

DESCRIPTION(內容):
**1.00mm Wire-to-Board
Housing (RoHS)**

PART NO:
(料 號) CSHD-H10-2X__
DWG NO(圖號): 1000D-2xXX

DRAWN(製圖):
Gary
CHECKED(確認):
MANDY

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
X.XX ± 0.2
X.X ± 0.3

SCALE(比例):
FREE

REV:
R0
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV
R0
R1
R2
R3

DESCRIPTION
環保料

DATE
2025.10.30