

RECOMMENDED P.C.B LAYOUT(TOP VIEW)




NOTES:

Material: PA9T, UL 94V-0 (Color:Nature).
 Contact: Copper Alloy, Tin Plated.
 Nail: Copper Alloy, Tin Plated.
 PACKING: 1500pcs/reel.

PART NO.

CGH-W125R-XX-SMTR

Poles

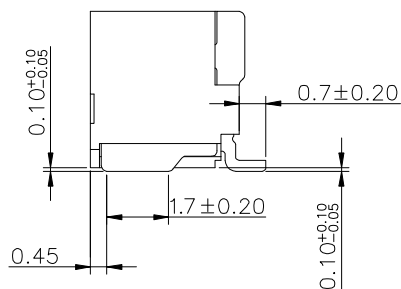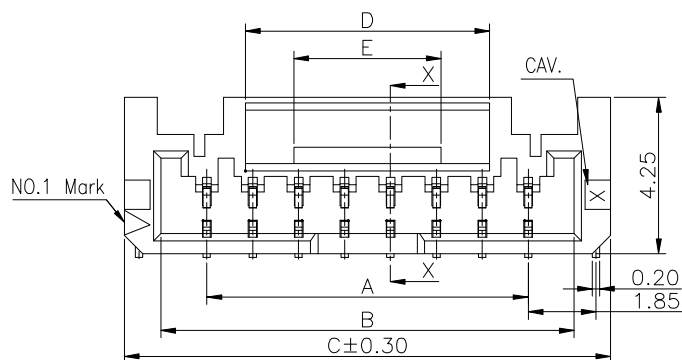

X-X

Poles	A	B	C	D	E
02	1.25	3.75	5.75	2.10	0.75
03	2.50	5.00	7.00	3.40	1.30
04	3.75	6.25	8.25	4.65	2.10
05	5.00	7.50	9.50		
06	6.25	8.75	10.75	6.65	4.00
07	7.50	10.00	12.00		
08	8.75	11.25	13.25		
09	10.00	12.50	14.50	8.60	6.00
10	11.25	13.75	15.75		
11	12.50	15.00	17.00		
12	13.75	16.25	18.25		
13	15.00	17.50	19.50		
14	16.25	18.75	20.75		
15	17.50	20.00	22.00		



DESCRIPTION(內容):
**1.25mm Pitch Wire to Board
 90° SMT (RoHS)**

PART NO:
 (料號) CGH-W125R-XX-SMTR
 DWG NO(圖號): JS-1289SR-XX

DRAWN(製圖):
GONG
 CHECKED(確認):
TERESA
 APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
 (公差)
 X.X ±0.30
 X.XX ±0.20
 SCALE(比例):
FREE

REV:
R1
 UNIT:
mm
 SIZE:
A4
 SHEET:
1/1

REV	DESCRIPTION	DATE
R0	RELEASE	2014.05.29
R1	圖面更新	2016.10.13
R2		
R3		