


Circuit No.1



Specifications:

- Material: NY66 UL 94V-0
Glass fiber Polyester
- Poles: 02~30 (Single Row)
- Voltage Rating: 250V AC/DC
- Current Rating: 2A AC/DC
- Withstand Voltage: 800V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C

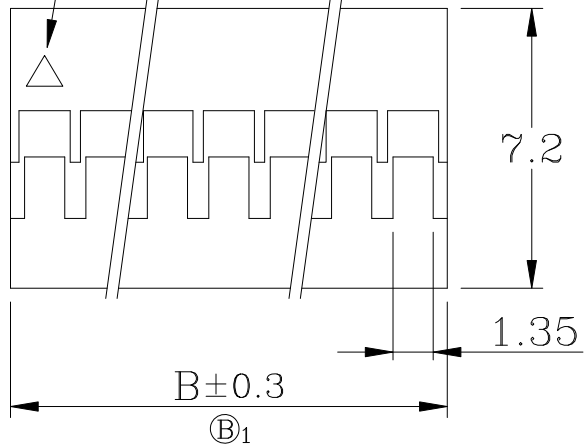

Dimensional & Ordering Information:

Part No.	Dimensions mm		Part No.	Dimensions mm	
	A	B		A	B
CMI-H200-02	2.00	4.30	CMI-H200-17	32.00	34.35
CMI-H200-03	4.00	6.30	CMI-H200-18	34.00	36.35
CMI-H200-04	6.00	8.30	CMI-H200-19	36.00	38.35
CMI-H200-05	8.00	10.30	CMI-H200-20	38.00	40.35
CMI-H200-06	10.00	12.30	CMI-H200-21	40.00	42.35
CMI-H200-07	12.00	14.30	CMI-H200-22	42.00	44.35
CMI-H200-08	14.00	16.30	CMI-H200-23	44.00	46.35
CMI-H200-09	16.00	18.30	CMI-H200-24	46.00	48.35
CMI-H200-10	18.00	20.30	CMI-H200-25	48.00	50.35
CMI-H200-11	20.00	22.30	CMI-H200-26	50.00	52.35
CMI-H200-12	22.00	24.30	CMI-H200-27	52.00	54.35
CMI-H200-13	24.00	26.30	CMI-H200-28	54.00	56.35
CMI-H200-14	26.00	28.30	CMI-H200-29	56.00	58.35
CMI-H200-15	28.00	30.30	CMI-H200-30	58.00	60.35
CMI-H200-16	30.00	32.35			