











2-4 Pin



5-9 Pin

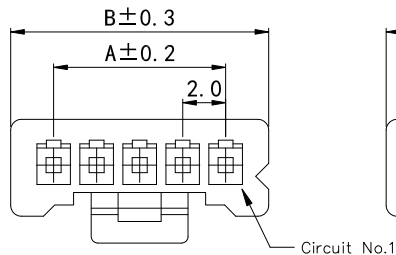

10-15 Pin

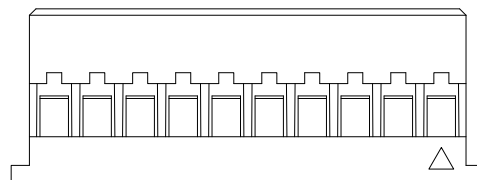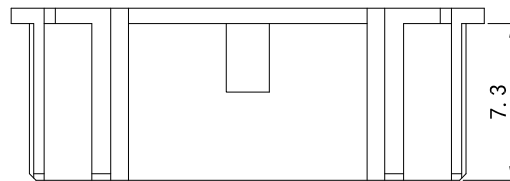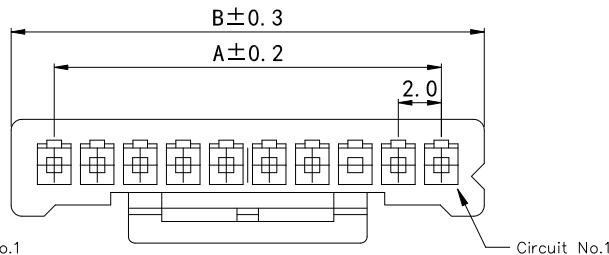

Specifications

Current Rating: 3A AC/ DC (Max) AWG#22

Voltage Rating: 250V AC/ DC

Temperature Range: -25° C ~ + 85° C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/Minute

Features:

Available number of circuits: 2 to 15 pin

Material: Nylon 66 UL 94V-0, natural



| Poles | Dimension mm (in.) | | Part No. |
|-------|--------------------|-------------|------------|
| | A | B | |
| 02 | 2.0(0.079) | 6.0(0.236) | CPA-H20-02 |
| 03 | 4.0(0.157) | 8.0(0.315) | CPA-H20-03 |
| 04 | 6.0(0.236) | 10.0(0.394) | CPA-H20-04 |
| 05 | 8.0(0.315) | 12.0(0.472) | CPA-H20-05 |
| 06 | 10.0(0.394) | 14.0(0.551) | CPA-H20-06 |
| 07 | 12.0(0.472) | 16.0(0.630) | CPA-H20-07 |
| 08 | 14.0(0.551) | 18.0(0.709) | CPA-H20-08 |
| 09 | 16.0(0.630) | 20.0(0.787) | CPA-H20-09 |
| 10 | 18.0(0.709) | 22.0(0.866) | CPA-H20-10 |
| 11 | 20.0(0.787) | 24.0(0.945) | CPA-H20-11 |
| 12 | 22.0(0.866) | 26.0(1.024) | CPA-H20-12 |
| 13 | 24.0(0.945) | 28.0(1.102) | CPA-H20-13 |
| 14 | 26.0(1.024) | 30.0(1.181) | CPA-H20-14 |
| 15 | 28.0(1.102) | 32.0(1.260) | CPA-H20-15 |



DESCRIPTION(內容):
2.0mm Wire-to-Board Housing (RoHS)

PART NO: (料號) CPA-H20-XX
DWG NO(圖號): 2000PA-XX

DRAWN(製圖): GONG
CHECKED(確認): TERESA
APPROVAL(核准): JOHNNY

GENERAL TOLERANCE: (公差)
X.XX ± 0.20
X.X ± 0.25
SCALE(比例): FREE

REV: R1
UNIT: mm
SIZE: A4
SHEET: 1/1

| REV | DESCRIPTION | DATE |
|-----|-------------------|------------|
| R0 | RELEASE | 2009.05.25 |
| R1 | 2014年8月料號P數編碼統一兩碼 | 2015.12.07 |
| R2 | | |
| R3 | | |