



SPECIFICATION:
 PITCH BETWEEN POLES : 2.54mm
 CURRENT RATING : 3A
 VOLTAGE RATING : 250V AC/DC
 CONTACT RESISTANCE : INITIAL VALUE/10mΩ max.
 AFTER ENVIRONMENTAL TESTING/20mΩ max.
 INSULATION RESISTANCE : 1000MΩ (min.)
 WITHSTAND VOLTAGE : 1000V AC/MINUTE
 TEMPERATURE RANGE : -25°C TO +85°C
 APPLCABLE WIRE : AWG #22 TO #28
FEATURES:
 MATERIAL : PBT UL94V-0
 ACCEPTS : CM-T2540_ CRIMP TERMINAL

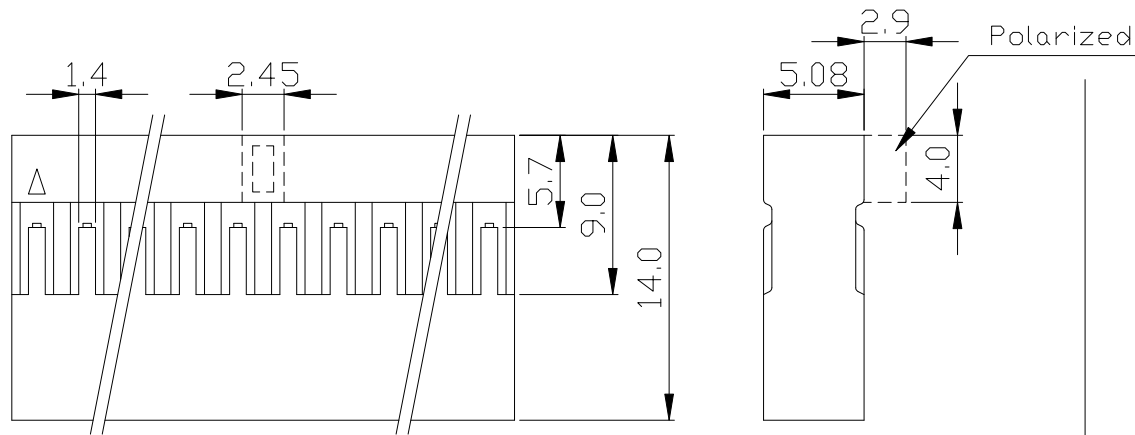

Dimensional and Order information

Circuits	Dimensions mm		Circuits	Dimensions mm	
	A	B		A	B
			42	50.80	53.34
04	2.54	5.08	44	53.34	55.88
06	5.08	7.62	46	55.88	58.42
08	7.62	10.16	48	58.42	60.96
10	10.16	12.70	50	60.96	63.50
12	12.70	15.24	52	63.50	66.04
14	15.24	17.78	54	66.04	66.58
16	17.78	20.32	56	66.58	71.72
18	20.32	22.86	58	71.72	73.66
20	22.86	25.40	60	73.66	76.20
22	25.40	27.94	62	76.20	78.74
24	27.94	30.48	64	78.74	81.28
26	30.48	33.02	66	81.28	83.82
28	33.02	35.56	68	83.82	86.36
30	35.56	38.10	70	86.36	88.90
32	38.10	40.64	72	88.90	91.44
34	40.64	43.18	74	91.44	93.98
36	43.18	45.72	76	93.98	96.52
38	45.72	48.26	78	96.52	99.06
40	48.26	50.80	80	99.06	101.60

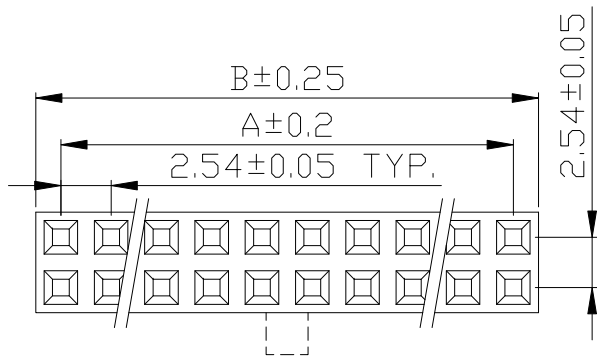

CM-H254-2xXX(無凸點)
 CM-H254-2xXXT(有凸點)



承洧科技股份有限公司
 Cherg Weei Technology Corp.

DESCRIPTION(內容):
 杜邦2.54mm 雙排 HOUSING(有.無凸點)
 (RoHS)
PART NO:
 (料號) CM-H254-2xXXT
DWG NO(圖號): 2541-H-2x
 2541-H-2xXR

DRAWN(製圖):
 Kevin
CHECKED(確認):
 Mandy
APPROVAL(核准):
 Johnny

GENERAL TOLERANCE:
 (公差) .000 :±0.08
 .00 :±0.15
 .0 :±0.25
SCALE(比例):
 FREE

REV:
R3
UNIT:
 mm
SIZE:
A4
SHEET:
1/1

REV	DESCRIPTION	DATE
R0		2006.07.10
R1	變更環保章字樣	2006.08.17
R2	修改接觸阻抗單位	2006.11.18
R3	2007年圖面版本更新	2007.07.30