


Specifications:

- Material: PBT UL 94V-0
- Standard Color: Black
- Voltage Rating: 250V AC/DC
- Current Rating: 3A AC/DC
- Withstand Voltage: 1000V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.



Dimensional and Order information

Circuits	Dimensions mm		Circuits	Dimensions mm	
	A	B		A	B
01		2.54	21	50.80	53.34
02	2.54	5.08	22	53.34	55.88
03	5.08	7.62	23	55.88	58.42
04	7.62	10.16	24	58.42	60.96
05	10.16	12.70	25	60.96	63.50
06	12.70	15.24	26	63.50	66.04
07	15.24	17.78	27	66.04	66.58
08	17.78	20.32	28	66.58	71.72
09	20.32	22.86	29	71.72	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60

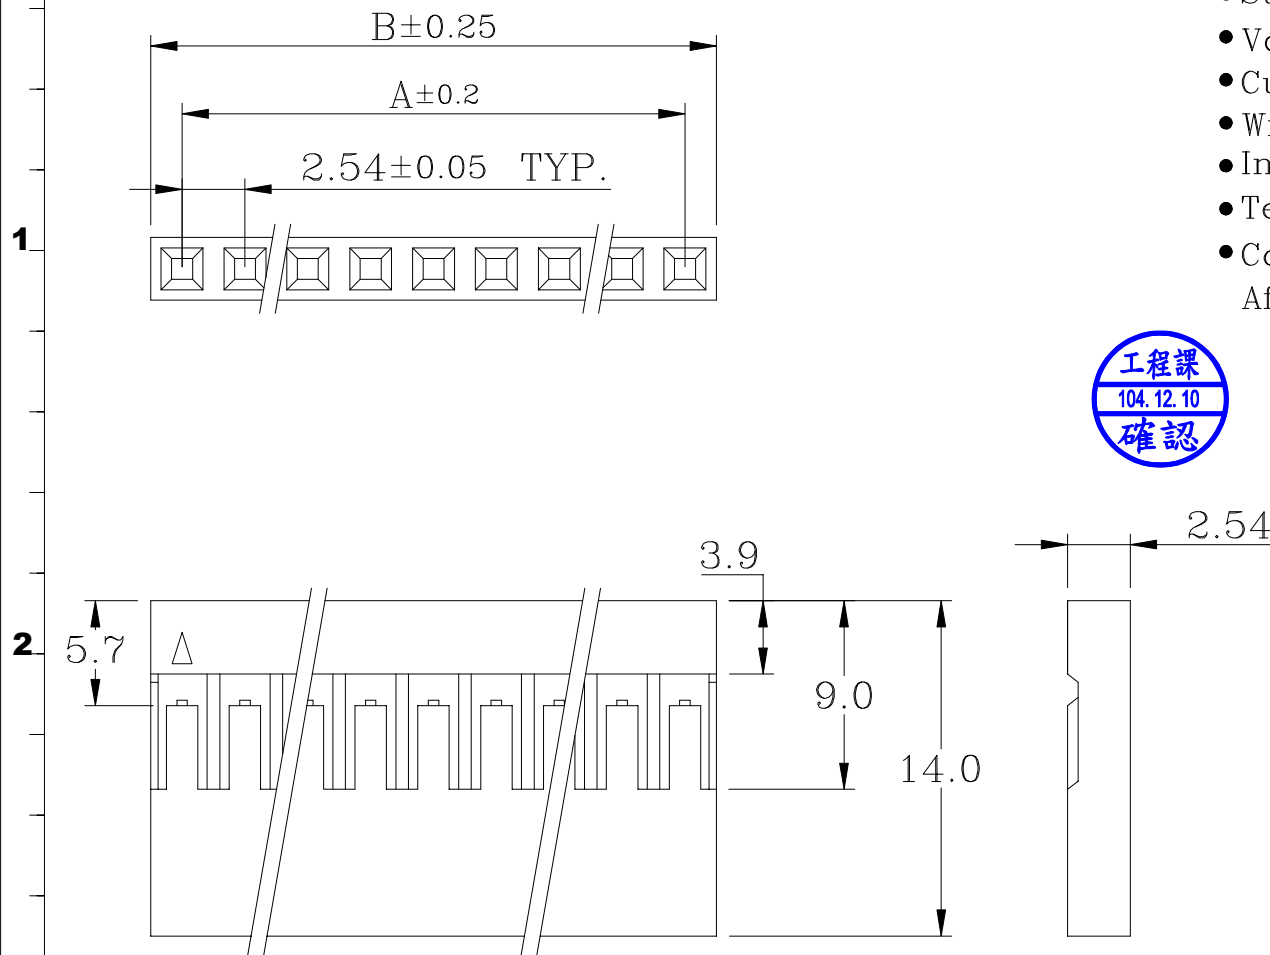


承洧科技股份有限公司
Cherg Weei Technology Corp.

DESCRIPTION(內容):
 杜邦 2.54mm 單排 HOUSING
 (RoHS)
PART NO:
 (料號) CM-H254-XX
DWG NO(圖號): 2541-H

DRAWN(製圖):
 DANIEL
CHECKED(確認):
 MANDY
APPROVAL(核准):
 Johnny

GENERAL TOLERANCE:
 (公差) .000 :±0.08
 .00 :±0.15
 .0 :±0.25
SCALE(比例):
 FREE

REV:
R1
UNIT:
 mm
SIZE:
A4
SHEET:
1/1

REV	DESCRIPTION	DATE
R0	環保料	2006.10.19
R1	修改接觸阻抗單位	2006.11.19
R2		
R3		