



P.C.B. hole dimensions

SPECIFICATIONS

Current Rating: 9A AC,DC  
 Voltage Rating: 600V AC,DC  
 Temperature Range: -25°C~+85°C  
 Contact Resistance: 10MΩ Min  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-2

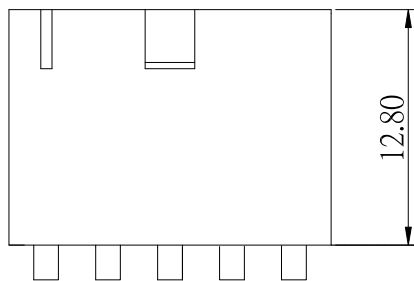

Dimensional & Ordering Information:

Part No.	Dimension(mm)	
	A	B
CR-W421-1x02	4.20	9.60
CR-W421-1x03	8.40	13.80
CR-W421-1x04	12.60	18.00
CR-W421-1x05	16.80	22.20
CR-W421-1x06	21.00	26.40



DESCRIPTION(內容):  
**Wafer (MiNi Fit 4.2) 90°  
 Single Row(RoHS)**

PART NO:  
 (料號) **CR-W421-1xXX**  
 DWG NO(圖號): **4203-RT-1xX**

DRAWN(製圖):  
**GONG**  
 CHECKED(確認):  
**TERESA**  
 APPROVAL(核准):  
**JOHNNY**

GENERAL TOLERANCE:  
 (公差)  
 .X ±0.40  
 .XX ±0.25  
 .XXX ±0.08  
 SCALE(比例):  
**FREE**

REV:  
**R4**  
 UNIT:  
**mm**  
 SIZE:  
**A4**  
 SHEET:  
**1/1**

REV  
**R0**  
**R1**  
**R2**  
**R3**  
**R4**

DESCRIPTION  
 RELEASE  
 修飾外觀  
 補充尺寸 Ⓐ  
 變更料號  
 2014料號P數編碼統一兩碼

DATE  
**2008.08.15**  
**2008.08.25**  
**2009.09.03**  
**2010.01.08**  
**2014.12.12**