

A

B

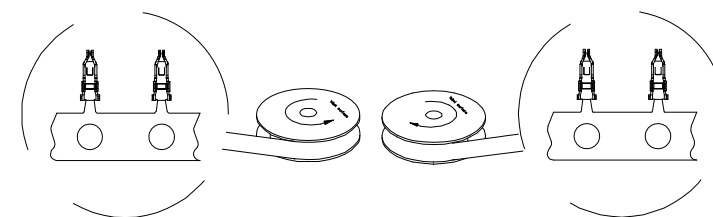


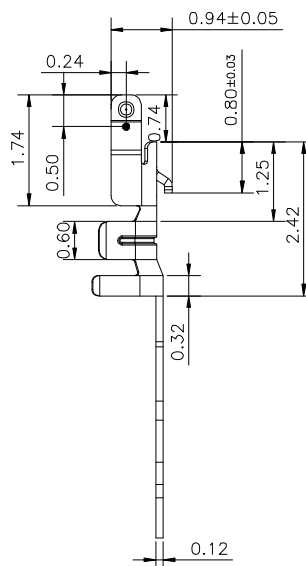
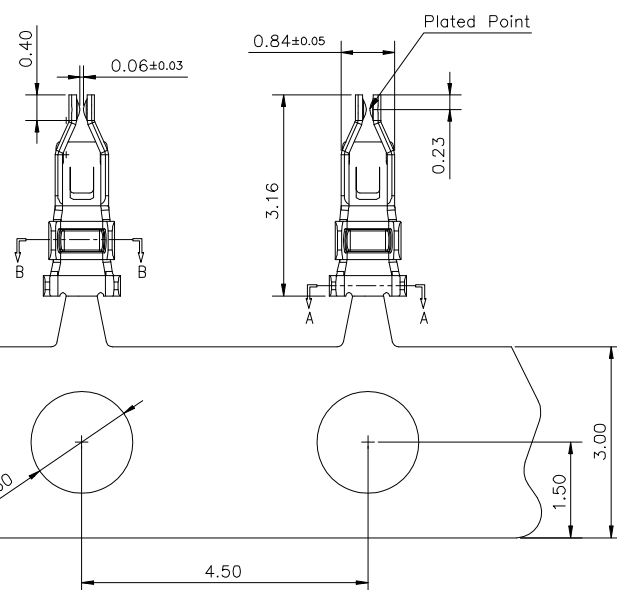

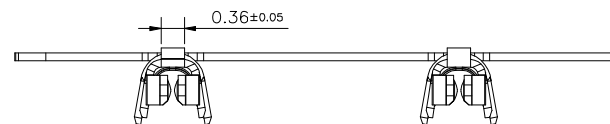
C

D

E

NOTES

1. MATERIAL IS COPPER ALLOY (T=0.12mm)
2. PLATING: 50u" MIN NICKEL UNDER PLATING OVER ALL GOLD FLASH 1u" MIN. ON PLATED AREA
3. WIRE RANGE: SUITABLE FOR
UL3302 AWG=28 OD=0.6mm
UL3302 AWG=30 OD=0.7mm
UL3302 AWG=32 OD=0.55mm
CURRENT RATING: 1AMPERES (PER PIN)
4. CRIMPING TOOLING REF. :
A. CONDUCTOR CRIMPIN: W=0.85mm(REF.)
B. INSULATOR CRIMPIN: W=0.90mm(REF.)
5. AFTER CRIMPING, CONTROL TERMINAL LENGTH: 1.0mm MAX.
6. PACKING: TAPE & REEL

WIND OPERATION AFTER
STAMPING AND BEFORE
PLATINGWIND OPERATION AFTER
PLATING AND BEFORE
ASSEMBLY

DESCRIPTION(內容):
**TERMINAL FOR 1.2mm
WTB CONN, TAPE&REEL
(RHS)**

PART NO:
(料 號) **CACH-T12GO-CF592**
DWG NO(圖號): **91224-00001**

DRAWN(製圖):
LUNT
CHECKED(確認):
TERESA
APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
.x ±0.5
.x ±0.25
.xx ±0.15
.xxx ±0.1
ANGLES ±2°
SCALE(比例):
FREE

REV:
R3
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV	DESCRIPTION	DATE
R0	RELEASE	2011.10.24
R1	變更鍍金內容(原:GOLD FLASH 1u" MIN)	2015.05.06
R2	更換確認章	2019.10.17
R3	圖面更新	2019.11.13