



A

B

C




D

E

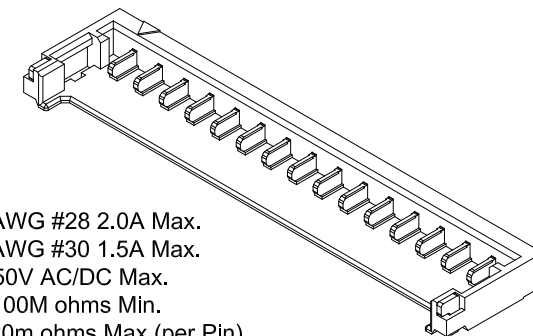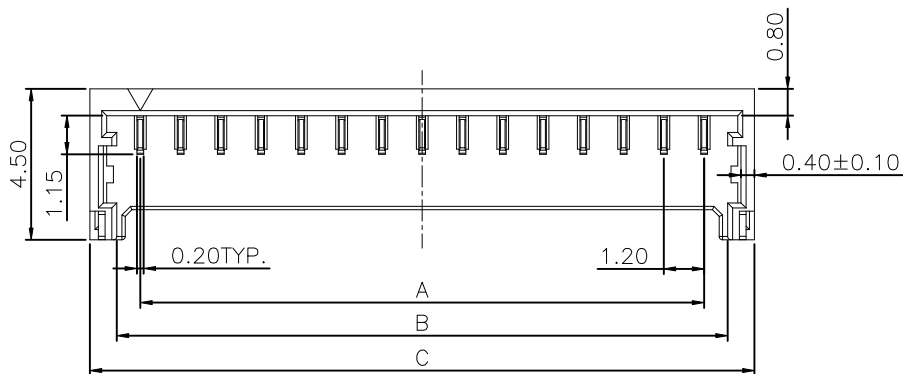

Specifications

Current Rating	: AWG #28 2.0A Max. : AWG #30 1.5A Max.
Voltage Rating	: 50V AC/DC Max.
Insulator Resistance	: 100M ohms Min.
Contact Resistance	: 20m ohms Max.(per Pin)
Operating Temperature	: -25°C ~ +85°C
Soldering Temperature	: 260°C for 3~5s Max.
Insulator Material	: Nylon-6T(日本三井RA230NK) (無鹵) Black UL94V-0
Contact Material	: Brass
Contact Plated	: Gold Flash all over, Nickel 50u" min. Under Plating Over All.
Fitting Nail Material	: Brass.
Fitting Nail Plated	: Matte Tin 100u" Min. Plating, Nickel 50u" min. Under Plating Over All.

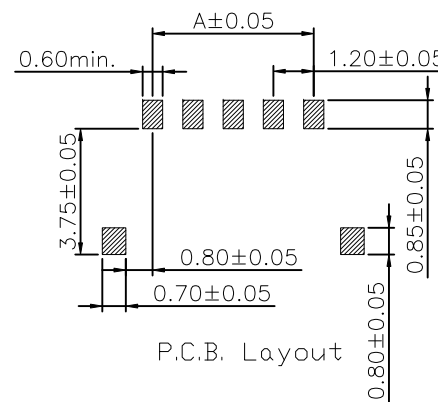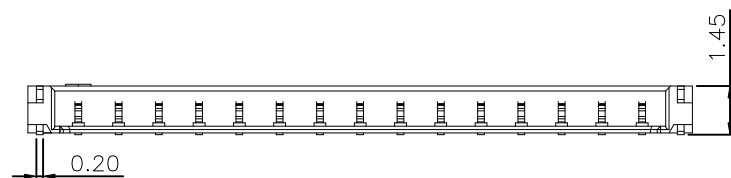

No.	A	B	C
*02	1.2	2.6	4.2
*03	2.4	3.8	5.4
*04	3.6	5.0	6.6
*05	4.8	6.2	7.8
*06	6.0	7.4	9.0
07	7.2	8.6	10.2
08	8.4	9.8	11.4
09	9.6	11.0	12.6
10	10.8	12.2	13.8
11	12.0	13.4	15.0
12	13.2	14.6	16.2
13	14.4	15.8	17.4
14	15.6	17.0	18.6
15	16.8	18.2	19.8

注：有“*”标识的为已开模Pin数



DESCRIPTION(内容):

PITCH 1.2MM Wafer Connector
端子镀金 NYLON-6T无鹵(RoHS)

PART NO:
(料 號) CACH-W12-XXG0-SR-CF438

DWG NO(圖號):

DRAWN(製圖):

黄炳秋

CHECKED(確認):

黄炳秋

APPROVAL(核准):

邓文广

GENERAL TOLERANCE:

(公差)

.X ±0.25
.XX ±0.15
ANG ±2°

SCALE(比例):

XX:XX



REV:

A/5

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

2

3

4

5

DESCRIPTION

修改圖面

修改塑膠材質

修改电气性能:额定电流、电压

修改塑胶材質牌号ECN20160818-1

DATE

2013.10.24

2013.11.12

2014.06.16

2014.06.16






A

B

C

D


E

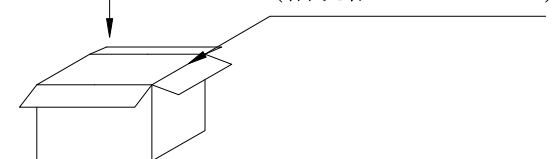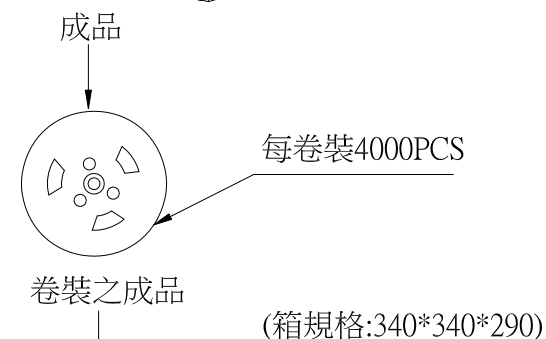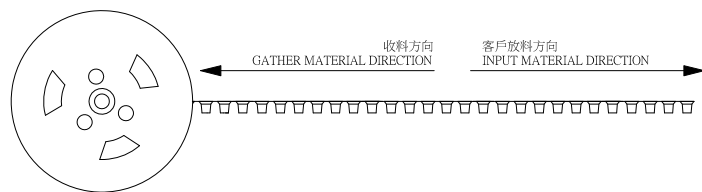

裝好成品之外箱



載帶卷料方向

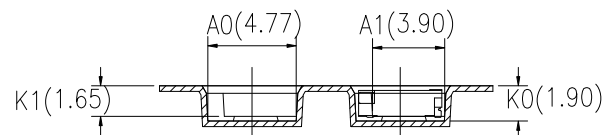

Notes:

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 250mm.
3. A and B measured on a plane 0.3mm above the bottom of the pocket.
4. K measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481-D requirements.
6. Material : Transpreant Polystyrene Alloy .
7. Thickness: $0.30 \pm 0.05 \text{ mm}$.
8. Packing length per 13" reel : 32.6Meters.
9. Component loader per 13" reel : 4000 pcs.
10. Packing length per 7" reel : 8.6Meters.
11. Component loader per 7" reel : 1000 pcs.

注：未注明公差为 ± 0.1 ；
F值以B0为中心；
P2值以A0为中心。

7"Reel R191A-XX僅用於低於1000Pcs送樣包裝

Poles	W	F	S	B0	B1	13" REEL 編碼	13" Reel 包裝數量	7" REEL 編碼	7" Reel 包裝數量	R/箱
02	12.0	5.5		4.50	2.00	R191-02	4000PCS	R191A-02	1000PCS	15
03	16.0	7.5		5.70	3.20	R191-03	4000PCS	R191A-03	1000PCS	12
04	16.0	7.5		6.90	4.40	R191-04	4000PCS	R191A-04	1000PCS	12
05	16.0	7.5		8.10	5.60	R191-05	4000PCS	R191A-05	1000PCS	12
06	16.0	7.5		9.30	6.80	R191-06	4000PCS	R191A-06	1000PCS	12



DESCRIPTION(內容):

PITCH 1.2MM Wafer Connector
端子鍍金 NYLON-6T 无卤(RoHS)

PART NO:
(料號) CACH-W12-XXG0-SR-CF438 (包裝圖)

DWG NO(圖號):

DRAWN(製圖):

黃炳秋

CHECKED(確認):

黃炳秋

APPROVAL(核准):

鄧文廣

GENERAL TOLERANCE: (公差)

.X
.XX
.XXX

SCALE(比例):

1:XX

REV:

A/2

UNIT:

mm

SIZE:

A4

SHEET:

2/2

REV

1

2

3

4

DESCRIPTION

修改13" 卷盤包裝數量

DATE

2013.07.17

2015.12.17