




SPECIFICATION

1. Electrical char:
- Insulation Resistance: 500M-Ohm Min.
 - Contact Resistance : 20milli-Ohm Max.
 - Rating Current : 1.5A Max.
 - Rating Voltage : 120V AC.
 - Dielectric Voltage : 1000 Vrms 60 Sec. Min.
2. Physical char:
- Houing (Option):
- PBT Glass Filled (UL 94V-0),
 - Soldering Temperature:235℃.
 - Color : Black.
- Spring Wire:
- 0.35mm Thickness Phosphor bronze
 - Gold Plating Over Nickel.
- Temperature Range: -40℃ ~ +85℃.
- Durability : 500 Mating cycles Min.

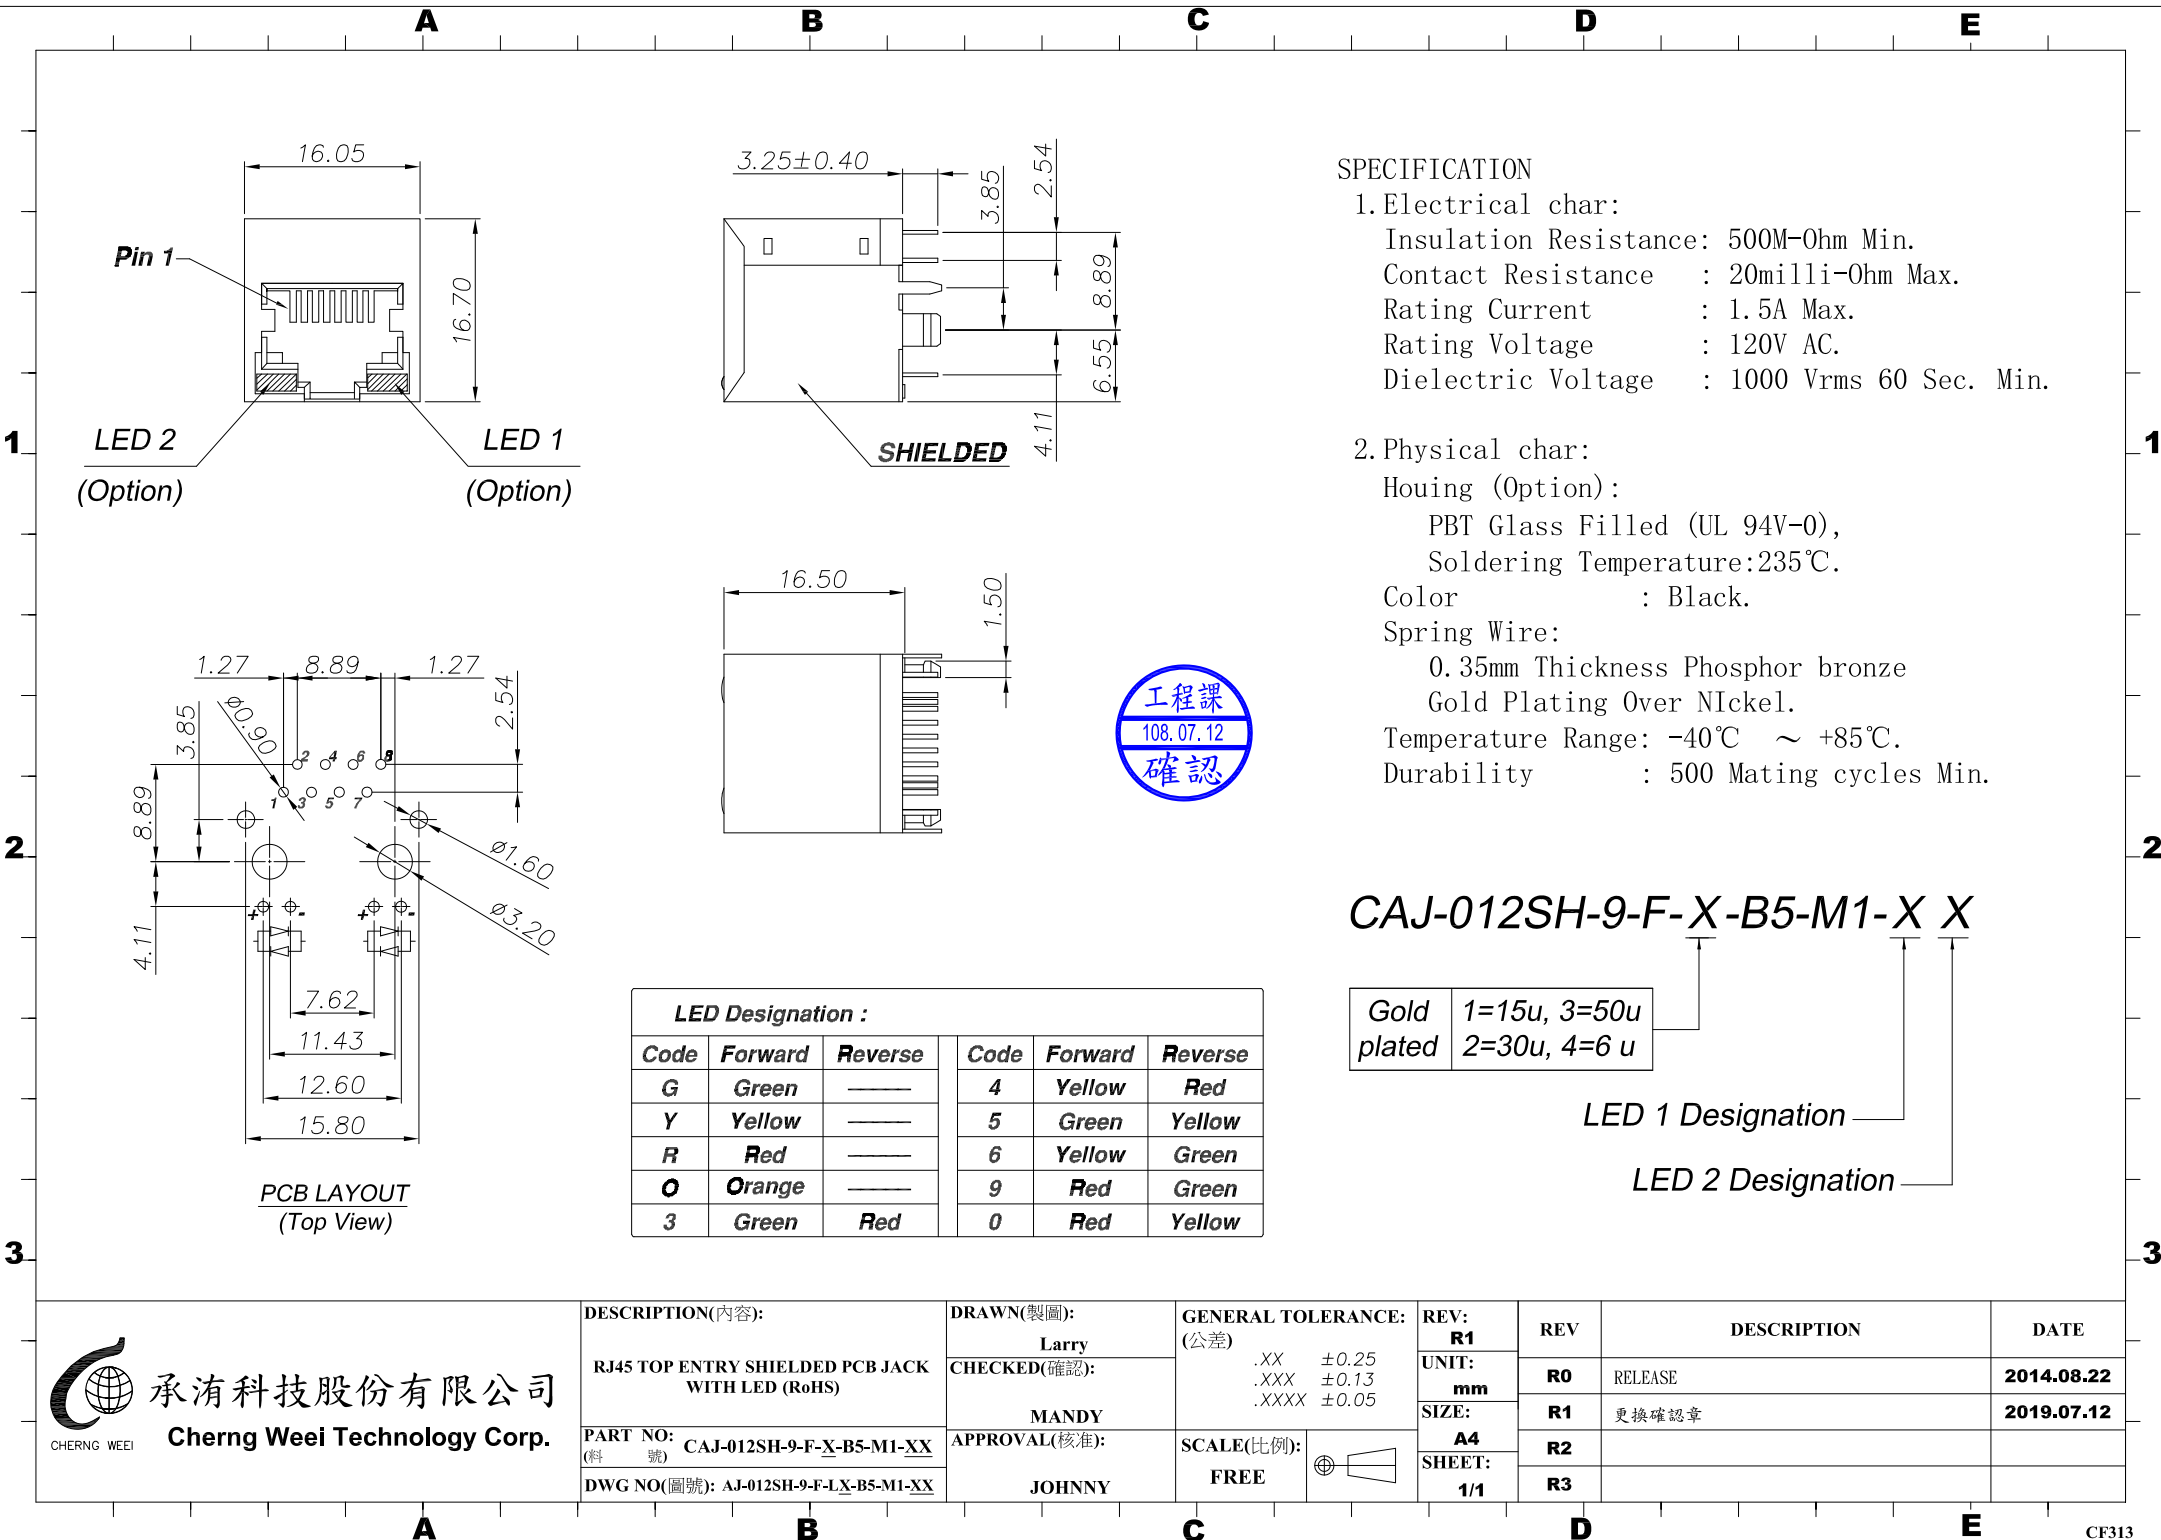

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE: (公差)		REV: R1	REV	DESCRIPTION	DATE
RJ45 TOP ENTRY SHIELDED PCB JACK WITH LED (RoHS)	Larry	.XX ±0.25		UNIT: mm	R0	RELEASE	2014.08.22
	CHECKED(確認):	.XXX ±0.13		SIZE: A4	R1	更換確認章	2019.07.12
	MANDY	.XXXX ±0.05			R2		
PART NO: (料 號) CAJ-012SH-9-F-X-B5-M1-XX	APPROVAL(核准):	SCALE(比例):		SHEET: 1/1	R3		
DWG NO(圖號): AJ-012SH-9-F-LX-B5-M1-XX	JOHNNY	FREE					