

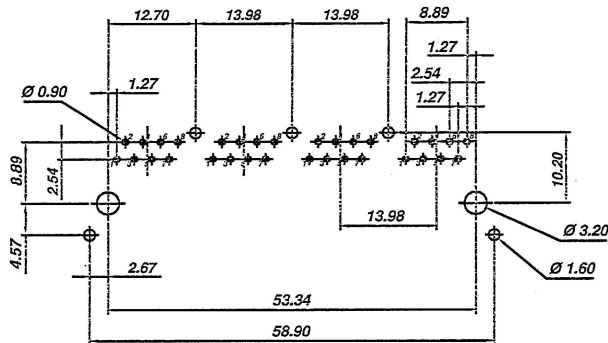
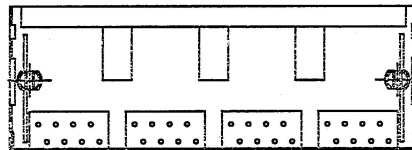




PCB LAYOUT
(Top View)

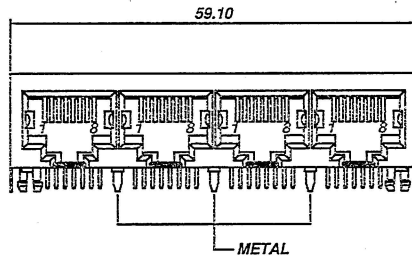

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC.
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing (Option) :

PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C

Color : Black Color

Spring Wire :

0.45mm Dia. Phosphor bronze Gold Plating Over Nickel

Shielded : Brass Plating Nickel

Temperature Range : - 40°C / +85°C

Durability : 500 Mating cycles Min.

CAJ-040SH-4 -F -X-A3-N1

NUMBER OF PORT

Gold plated 1=15u, 3=50u
2=30u, 4= 6 u

CHERNG WEEI TECHNOLOGY CORP.

TITLE

1x4 8POSITIONS
SIDE ENTRY SHIELDED PCB GANG JACK
(RoHS)

MODULAR JACKS ASSY FOR
CAJ-040SH-4 -F -X-A3-N1

SCALE SIZE DWG. NO. 9638-S SERIES

DWG. NO.

AJ-040SH-4-F-XX-A3-N1

NOT SCALED
DRAWING

THIRD ANGLE PROJECTION

CF313A(F)20081003/YUKI

TOLERANCE UNLESS OTHERWISE NOTICE

LINEAR MM

ANGLE+0°30'

00±0.25
000±0.13
0000±0.05

RADIAL

+0.45
-0.15

DR.

CK'D

APP'D

DATE