
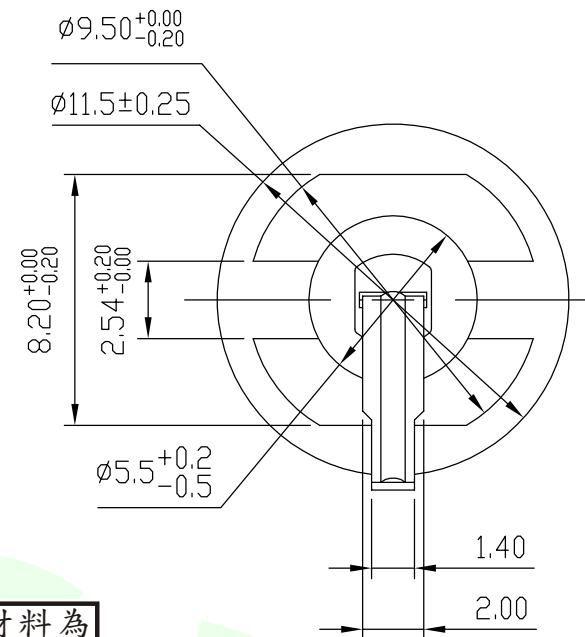


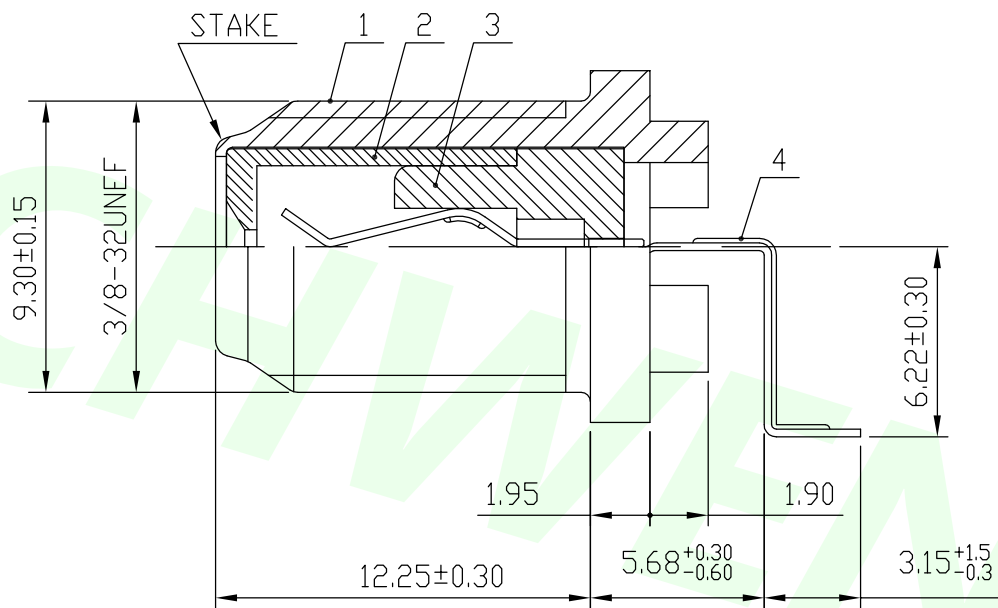

所有材料為
"環保材料"

2013.11.07

RoHS

NOTE:

- 1.CONTACT RESISTANCE: 30mΩ MAX(INITIAL) ; 60mΩ MAX(FINAL).
- 2.INSULATION RESISTANCE: 100 MΩ MIN AT 500V DC.
- 3.DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC FOR 1 MINUTE.
- 4.OPERATING TEMPERATURE RANGE:-20° C TO +80° C

4	TERMINAL	1	PHOSPHOR BRONZE T=0.25	—	TIN PLATED
3	HOUSING 1	1	PA9T+30%GF,UL94 V-0	BLACK	—
2	HOUSING 2 (TUBE)	1	PA9T+30%GF,UL94 V-0	BLACK	—
1	BODY	1	ZINC ALLOY	—	NI PLATING
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

