

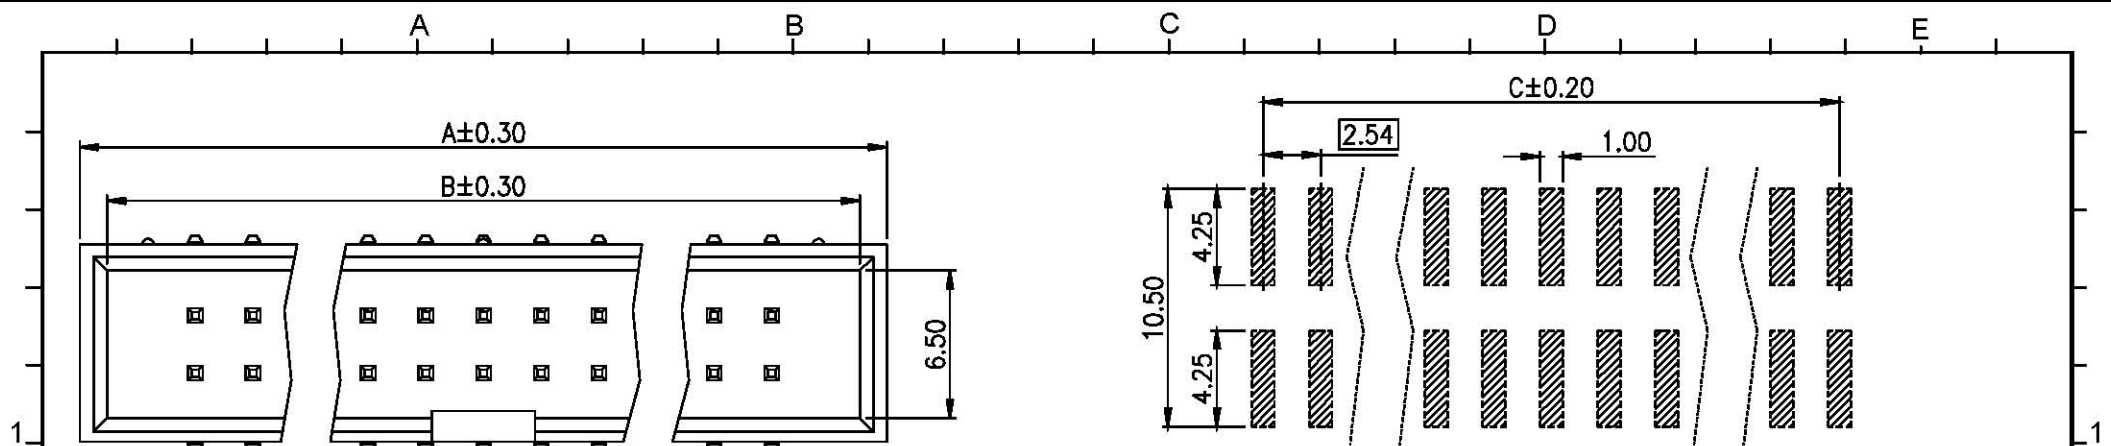


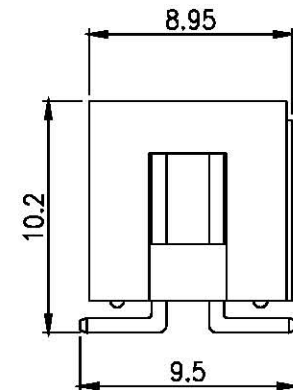

PCB Layout
(Top View)

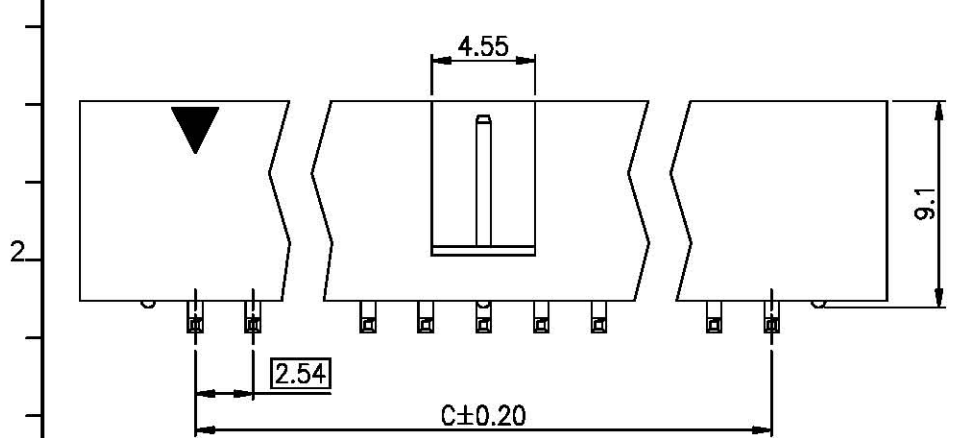

Material and Finish

- 1. Housing: Hi.Temp. Plastic Nylon-6T (UL94V-0), Black.
- 2. Terminal: Sq. 0.64mm Copper Alloy, Gold Plating

Electrical Characteristics

- 1. Current Rating: 3.0 Amp. Max..
- 2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
- 3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

- 1. Operating Temperature: -55°C ~ +105°C



Order Information	Dimensions				Order Information	Dimensions			
	Pos.	A	B	C		Pos.	A	B	C
CHEB254006S	06	15.24	12.94	5.08	CHEB254024S	24	38.10	35.80	27.94
CHEB254008S	08	17.78	15.48	7.62	CHEB254026S	26	40.64	38.34	30.48
CHEB254010S	10	20.32	18.02	10.16	CHEB254030S	30	45.72	43.42	35.56
CHEB254012S	12	22.86	20.56	12.70	CHEB254034S	34	50.80	48.50	40.64
CHEB254014S	14	25.40	23.10	15.24	CHEB254040S	40	58.42	56.12	48.26
CHEB254016S	16	27.94	25.64	17.78	CHEB254044S	44	63.50	61.20	53.34
CHEB254020S	20	33.02	30.72	22.86	CHEB254050S	50	71.12	68.82	60.96

 承洧科技股份有限公司 Cherng Wee Technology Corp.	DESCRIPTION: 2.54mm Box Header PCB Surface Mount Dual Rows SMT(RoHS)	DRAWN: DANIEL	GENERAL TOLERANCE 0.0 ±0.30 0.00 ±0.20		REV: R2	REV	DESCRIPTION		DATE
	PART NO: CHEB2540XXS	CHECKED: MANDY			UNIT: mm				
	DWG NO: HD220701	APPROVAL: Johnny	SCALE: FREE		SIZE: A4		環保料		2006.07.03
					SHEET: 1/1		變更環保章字樣		2006.08.11