

A

B

C


D

E

 $1.27 \times \text{No. of positions} \pm 0.5$ $1.27 \times (\text{No. of contacts} - 1) \pm 0.25$ 2.1 ± 0.2

第1PIN

第2PIN



P. C. B Hole Layout

Specifications



Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard Finish	:Nylon-6T/LCP
Standard	:Gold Plated
Standard	:Gold Flash all over

1

1

2

2

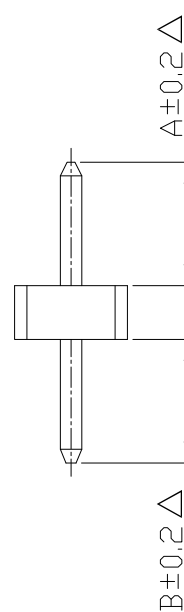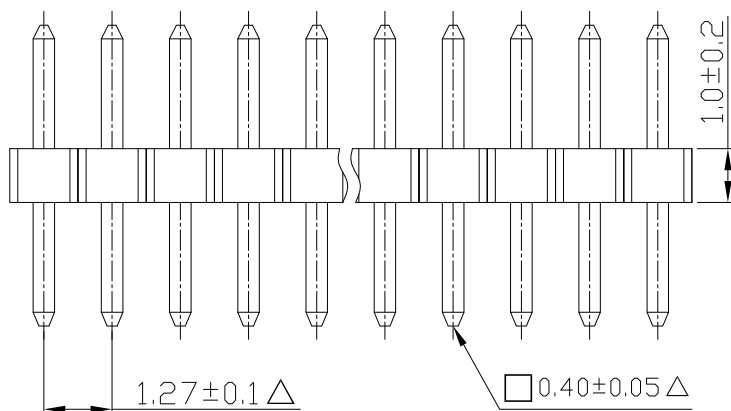

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P505	X	X	X	A / B	X X
(Pin Header Single Row) P505 (H:1.0 W:2.1)	S: Straight Type ...	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T C: LCP (Standard: N)	A (023) B (023) (If you desire on other length, by marking put desired in the A/B)	(01 TO 50 Contacts)

Dim(2.3/2.3):

A: _____ B: _____

3

3



CHERNG WEEI

DESCRIPTION(内容):

1.27mm Pin Header H:1.0 180° □=0.40 (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):
1:XXREV:
A/1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

A

B

C

D

E