

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40℃ ~ +105℃
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/LCP
Finish	:Gold Plated
Standard	:Gold Flash all over

How to order

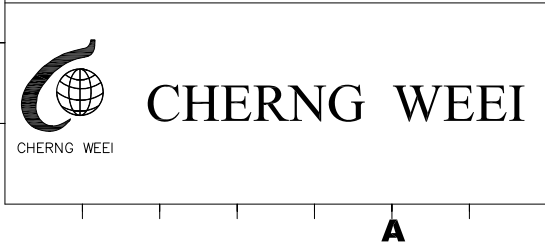
Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	A、B TYPE
P50X	X	X	X	A	XX	XT
(Pin Header Single Row)	M:SMT Type M2:0.20mm M4:0.25mm M6:0.50mm M8:1.00mm ⋮	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold I:30U"Gold (Standard:G)	N:Nylon-6T C:LCP (Standard:N)	A (020) (If you desire on other length, by marking put desired in the A)	(02 TO 50 Contacts)	AT:A TYPE BT:B TYPE

Selectivity:

- ☐ P501 (H:2.54 W:2.5 展開:5.0) (Material (Sandard):Nylon-6T)
- ☐ P505 (H:1.0 W:2.1 展開:4.3) (Material (Sandard):Nylon-6T)
- ☐ P506 (H:1.5 W:2.4 展開:3.4) (Material (Sandard):Nylon-6T)

Dim(2.0):

A: _____

	DESCRIPTION(内容): 1.27mm Pin Header H:2.54 SMT □=0.40 (RoHS)	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV: R0	REV	DESCRIPTION	DATE
	PART NO: (料 號)	CHECKED(確認):	X. ±0.30 X. ° ±5.0° .X ±0.20 .X ° ±3.0° .XX ±0.15 .XX ° ±1.0°	UNIT: mm	R0	△ 此符號表示重點管控尺寸	
	DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1		
				SHEET: 1/1	R2		
					R3		