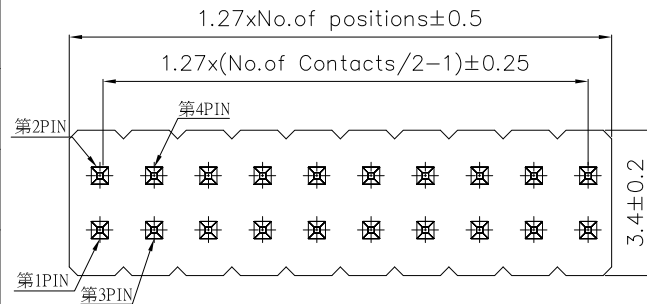


P.C.B Hole Layout

Specifications


Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/LCP
Finish	:Gold Plated
Standard	:Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P605	X	X	X	A / B	X X
(Pin Header Dual Row) P605 (H:1.0 W:3.4)	S:Staright Type ...	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T C:LCP (Standard:N)	A (030) B (023) (If you desire on other length, by marking put desired in the A/B)	(04 TO 100 Contacts)

Dim(3.0/2.3):

A: _____

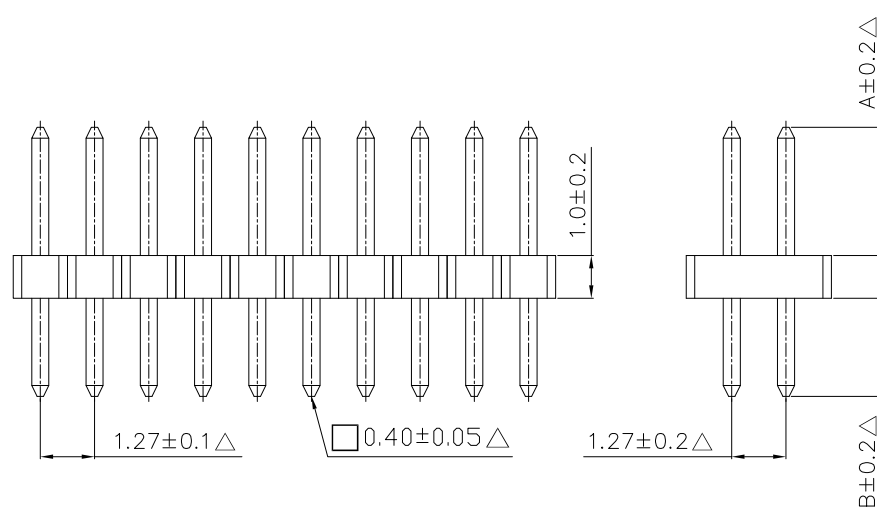

DESCRIPTION(内容):

1.27mm Pin Header H:1.0 180° □=0.40 (RoHS)

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

X. ±0.30 X. ° ±5.0°
.X ±0.20 .X ° ±3.0°
.XX ±0.15 .XX ° ±1.0°

SCALE(比例):
1:XX



REV:
A/1

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE