



A

B

C

D

E

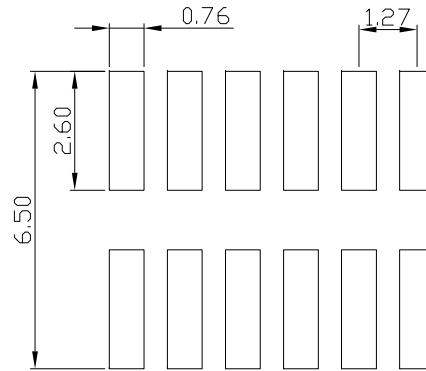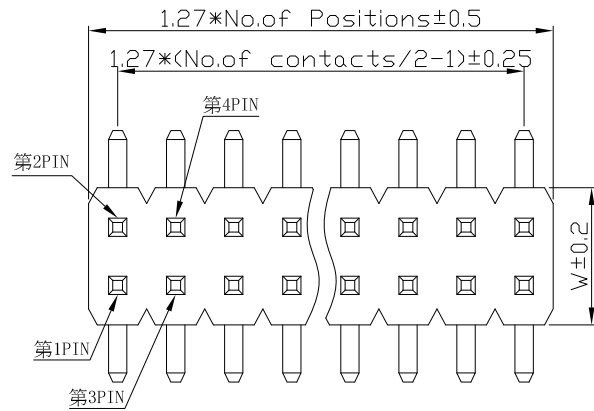

P. C. B. Hole Layout

## Specifications

|                         |                                                   |
|-------------------------|---------------------------------------------------|
| Current Rating          | : 1 Amp                                           |
| Insulator Resistance    | : 1000 Megohms Min.                               |
| Dielectric Withstanding | : AC 500 V                                        |
| Operating Temperature   | : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ |
| Soldering Temperature   | : $260^{\circ}\text{C}$ for 3~5sec Max.           |
| Contact Material        | : Copper Alloy                                    |
| Insulator Material      | : Polyester, UL 94V-0                             |
| Standard                | : Nylon-6T/LCP                                    |
| Finish                  | : Gold Plated                                     |
| Standard                | : Gold Flash all over                             |

## How to order

| Series                | Connector Type                                                             | Contact Plating                                                                                                                    | Material                            | Pin Length mm                                                                  | Number of Contacts   |
|-----------------------|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------------------------------------------------------------|----------------------|
| P6XX                  | X                                                                          | X                                                                                                                                  | X                                   | A                                                                              | X   X                |
| (Pin Header Dual Row) | M: SMT Type<br>M2: 0.20mm<br>M4: 0.25mm<br>M6: 0.50mm<br>M8: 1.00mm<br>... | G: Gold Flash<br>T: Tin Plated<br>A: 10U"Gold<br>B: 15U"Gold<br>C: 20U"Gold<br>© Duplex Plating<br>D: Gold Flash/Tin (Standard: G) | N: Nylon-6T<br>C: LCP (Standard: N) | A<br>(030)<br>(If you desire on other length, by marking put desired in the A) | (04 TO 100 Contacts) |

## Selectivity:

- ☐ P601 (H: 2.54 W: 3.0 展開: 5.5) (Material (Standard): Nylon-6T)
- ☐ P604 (H: 1.5 W: 3.4 展開: 5.5) (Material (Standard): Nylon-6T)
- ☐ P606 (H: 1.0 W: 3.4 展開: 4.8) (Material (Standard): Nylon-6T)

## Dim(3.0):

A: \_\_\_\_\_



CHERNG WEEI

DESCRIPTION(内容):

1.27mm Pin Header H:2.54 SMT □=0.40 (RoHS)

PART NO:  
(料 號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:  
(公差)

|     |       |      |       |
|-----|-------|------|-------|
| X.  | ±0.30 | X.°  | ±5.0° |
| .X  | ±0.20 | .X°  | ±3.0° |
| .XX | ±0.15 | .XX° | ±1.0° |

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

A

B

C

D

E

FILE NO: CWJ-4E-09