

A

B

C

D

E

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLUE (PANTONE 300C)
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY,
GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -30°C~+85°C




PART NO.:

UAF-091MXCBL-CF1066

CONTACT PLATED OPTION
G: GOLD FLASH
B: 15u" GOLD



1

1

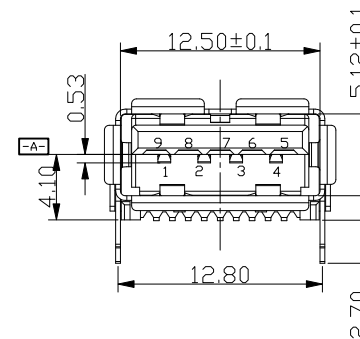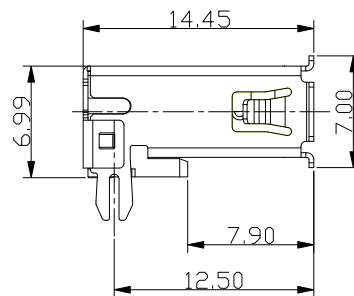

2

2

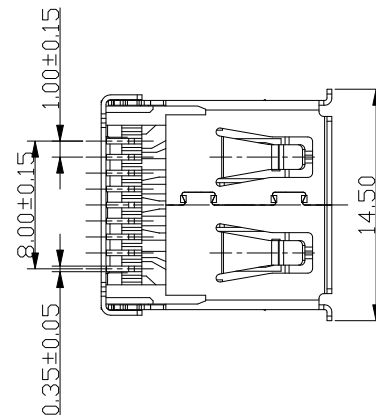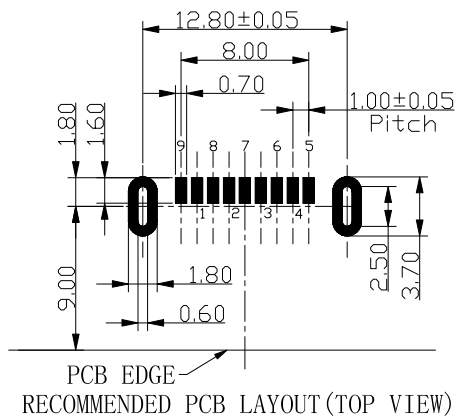

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield



3

3

DESCRIPTION(内容):

USB 3.0 A TYPE, PCB MOUNT, SMT
METAL SHIELD, FEMALE(RoHS)

PART NO:
(料 號) UAF-091MXCBL-CF1066

DWG NO(圖號): 22EB-09XT-111L

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE

REV:
R1UNIT:
mmSIZE:
A4SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

圖面更新

DATE

2012.08.31

2018.06.29

A

B

C

D

E

CF1066