


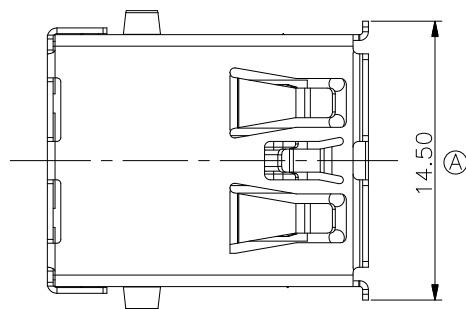

MATERIALS

HOUSING: PBT (UL 94V-0), BLUE (PANTONE 300C)

SHELL: STEEL, NICKEL PLATING.

TERMINAL: PHOSPHOR BRONZE(1~4Pin)& BRASS(5~9Pin),

GOLD ON CONTACT AREA , TIN PLATING ON SOLDER TAIL.

SPECIFICATION




CURRENT RATING: 1.5 AMP MAX.

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE.

CONTACT RESISTANCE: 30m OHMS MAX.


INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V.

OPERATION TEMPERATURE: -30°C ~ +85°C

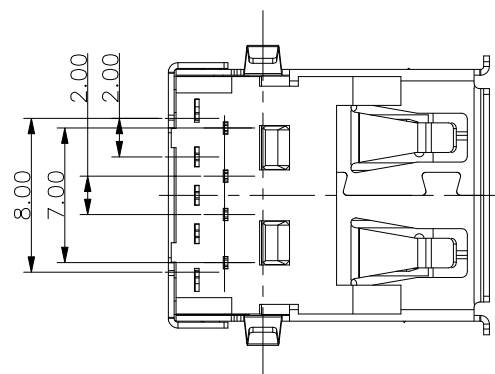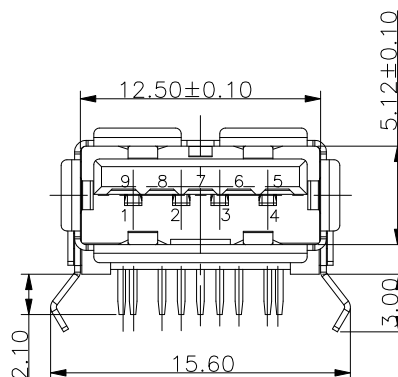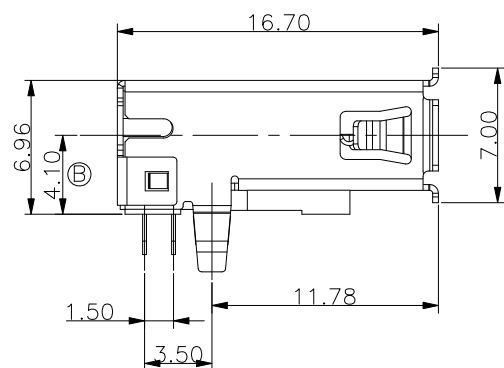

Pin NUMBER	SIGNAL NAME	Pin NUMBER	SIGNAL NAME
1	VBUS	6	StdA_SSRX+
2	D-	7	GND_DRAIN
3	D+	8	StdA_SSTX-
4	GND	9	StdA_SSTX+
5	StdA_SSRX-	Shell	Shield

Part No.	Finish
UAF-091RGPBL-CF1066	Gold Flash
UAF-091RBPBL-CF1066	Gold 15u"

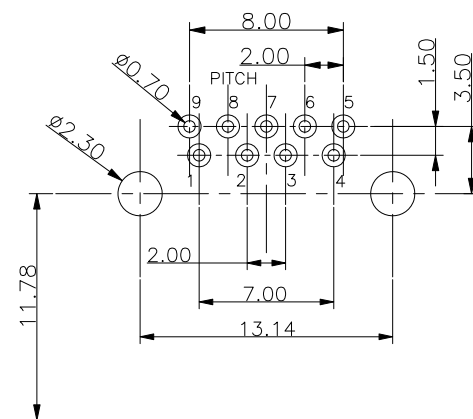

RECOMMENDED PCB LAYOUT
(TOLERANCE+±0.05)

DESCRIPTION(内容):

USB 3.0 A TYPE, 90° FEMALE
PCB MOUNT, METAL SHILED
(RoHS)

PART NO:
(料 號) UAF-091RXPBL-CF1066

DWG NO(圖號): 22EC-094T-118L

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

圖面更新

新增(A)、(B)尺寸

新增鍍金選項

DATE

2012.10.17

2017.03.20

2017.12.20

2018.08.22