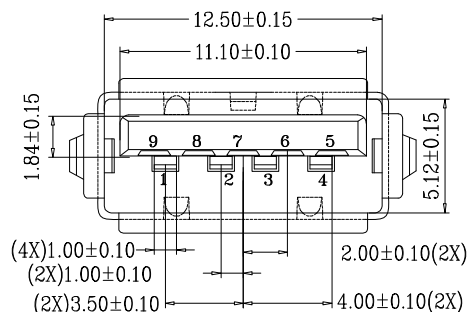
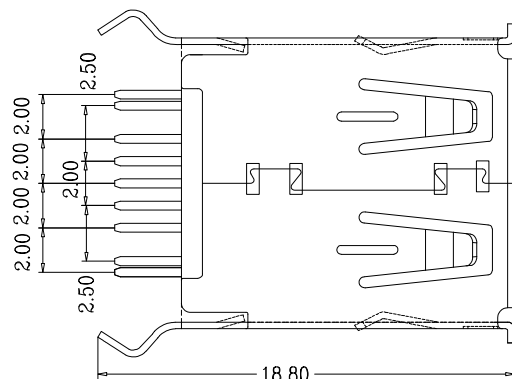
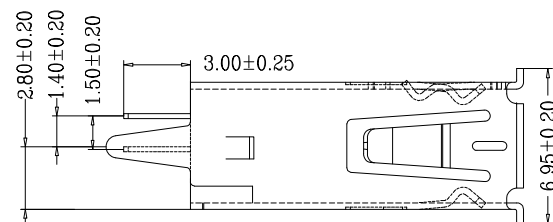
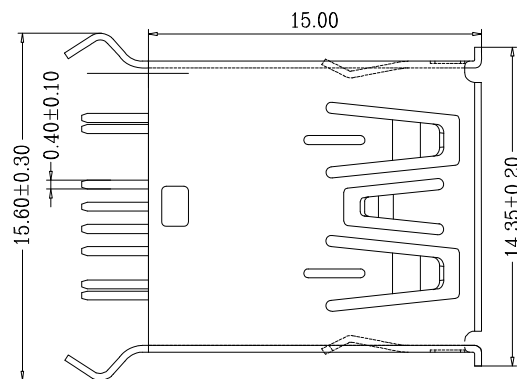


RECOMMENDED PCBA LAYOUT

MATERIALS

HOUSING: PBT (UL 94V-0), BLUE (PANTONE 300C)

SHELL: STEEL, NICKEL PLATING

TERMINAL: COPPER ALLOY,
GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -30°C~+85°C



PART NUMBER

UAF-091VXPBL-CF1066

CONTACT PLATED OPTION

G: GOLD FLASH

B: 15u" GOLD



承洧科技股份有限公司
Chereng Wee Technology Corp.

DESCRIPTION(内容):

USB 3.0 A TYPE,PCB MOUNT,
VERTICAL,METAL SHIELD,FEMALE
(RoHS)

PART NO:
(料 號) UAF-091VXPBL-CF1066

DWG NO(圖號): 22EA-09XT-111L

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2017.08.30

A

B

C

D

E

CF1066