

A

B

C

D

E

MATERIALS

HOUSING: PBT (UL 94V-0),
SHELL: COPPER ALLOY/C2680, NICKEL PLATING
TERMINAL: COPPER ALLOY/C5191,
GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+60°C

1






2

3

1

2


3

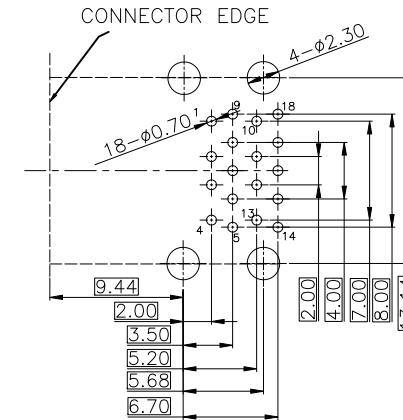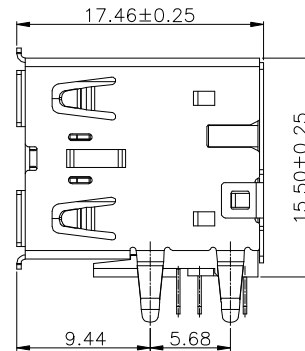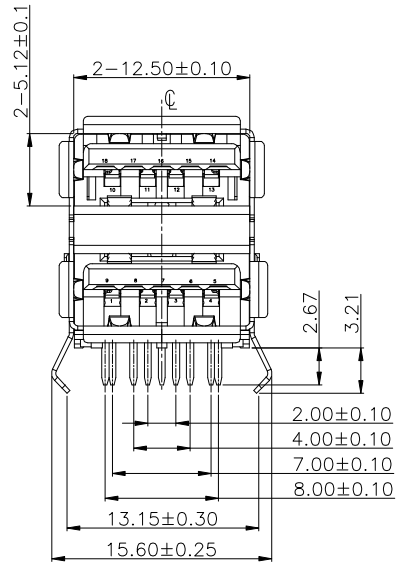

P.C.B. LAYOUT (COMPONENT SIDE)
DEFAULT TOLERANCE: ±0.05



Part No.	Finish
UAF-182RBPBL-CF1066	Gold 15u"
UAF-182RGPBL-CF1066	Gold Flash

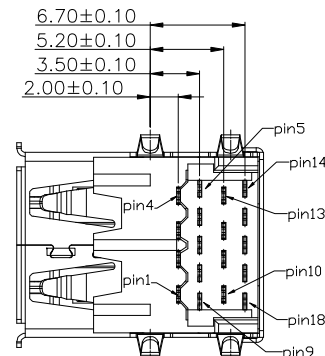

PIN ASSIGNMENT:

PIN NO.	1	2	3	4	5	6	7	8	9
	10	11	12	13	14	15	16	17	18
Signal Name	VBUS	D-	D+	GND	StdA_SSRX-	StA_SSRX+	GND_DRAIN	StdA_SSTX-	StdA_SSTX+
Remark	USB2 Contact Pin				USB3 Contact Pin				



承洧科技股份有限公司
Cherng Wee Technology Corp.

DESCRIPTION(內容):

USB A TYPE,PCB MOUNT,METAL SHIELD
FEMALE,90° (RoHS)

PART NO:
(料 號) UAF-182RXPBL-CF1066

DWG NO(圖號): 22EC-29XT-114L

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.X ±0.3
.XX ±0.2

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE
變更料號(原:UAF-182RBPBL-CF1066)、
圖號(原:22EC-184T-114L)&外觀

DATE

2016.04.14

2018.12.26

A

B

C

D

E

CF1066