
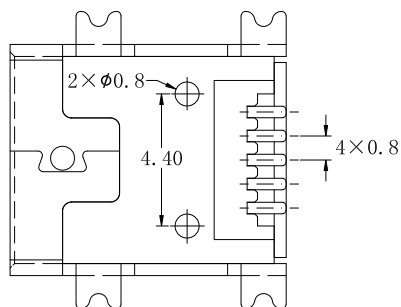
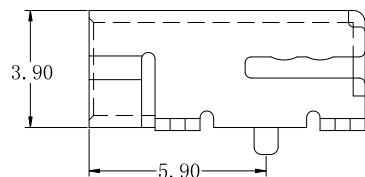
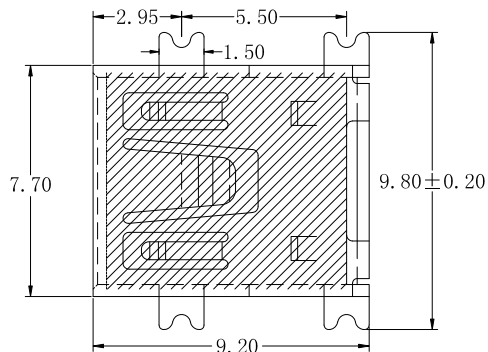


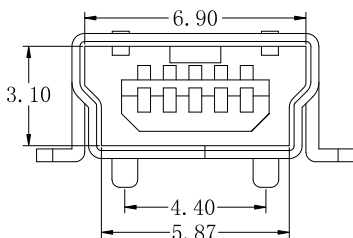

NOTE

Specification:


1. Current rating:1.0A/contact terminal
2. Voltage Rating: 30V DC.
3. Contact resistance: 50 milliohms MAX.
4. Dielectric Withstanding Voltage:300 V AC AT Sea Level
5. Insulation resistance: 100MEGA ohms MIN
6. Operating temperature: -20°C ~ +80°C.

Material:

1. Insulator: LCP, UL 94-V0 ,Color:Black
2. Contacts: Copper Alloy/C5191.
3. Shell: Copper Alloy/C2680.

3. Finishes:

- 3.1 Contacts: Gold plated on contacts Area;
Tin Plating on solder Tail.
- 3.2 Shell: Nickel Plating .

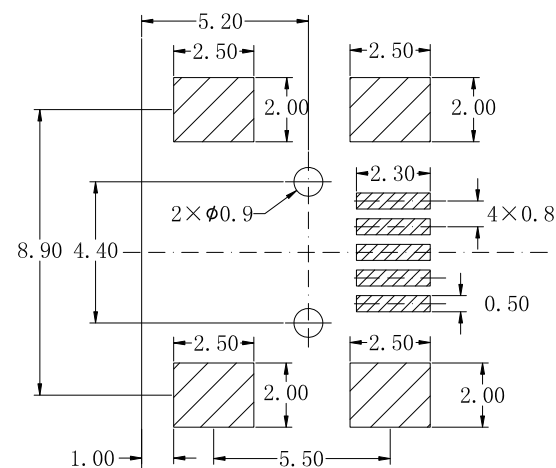

RECOMMENDED PCB LAYOUT

Part No.	FINISH
UMBF-051MGCB-CF1108	Gold Flash/Tin
UMBF-051MICB-CF1108	Gold 30u"/Tin

DESCRIPTION(内容):

MINI-U.S.B 5P B FEMALE S.M.T
(RoHS)

PART NO:
(料 號) UMBF-051M~~X~~CB-CF1108

DWG NO(圖號): AFGYF0001-P-XU-1

DRAWN(製圖):

mandy

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

. X ±0.30
. XX ±0.20
ANG. ±1°

SCALE(比例):

FREE



REV:

R4

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

R4

DESCRIPTION

RELEASE
補充料號說明(增鍍Gold Flash料)

變更Contacts Finishes

變更操作溫度範圍

模具毀損更新模具、圖面尺寸&電氣特性更新

DATE

2010.06.18
2010.10.07

2011.11.21

2014.09.26

2014.10.28