

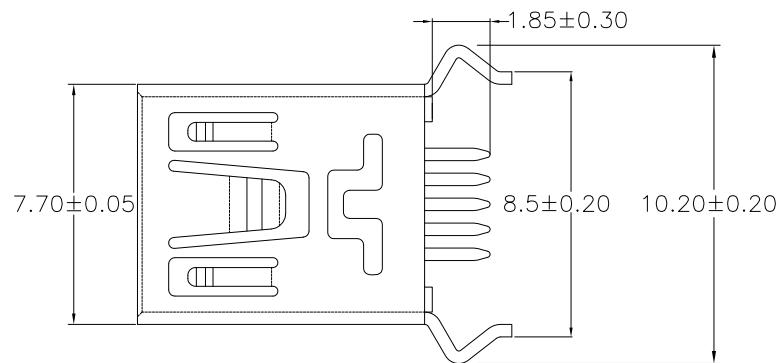


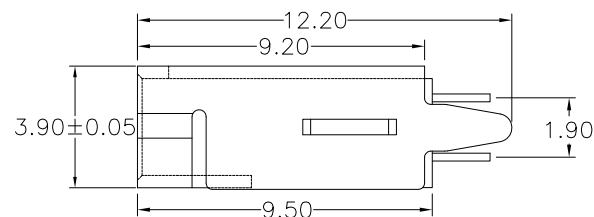

Part No.	Contact Finish
UMBF-051VGCB-CF1108	GOLD PLATED
UMBF-051VICB-CF1108	GOLD 30u"

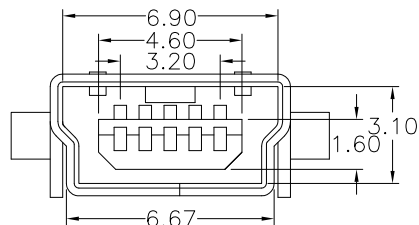

NOTE

Specification:


1. Current rating: 1.0A/contact terminal
2. Voltage Rating: 30V DC.
3. Contact resistance: 50 milliohms MAX.
4. Dielectric Withstanding Voltage: 300 V AC AT Sea Level
5. Insulation resistance: 100MEGA ohms MIN
6. Operating temperature: -20°C ~ +80°C.

Material:


1. Insulator: LCP, UL 94-V0, Color: Black
2. Contacts: Copper Alloy/C5191.
3. Shell: Copper Alloy/C2680.

3. Finishes:

- 3.1 Contacts: Gold plated on contacts Area;
Tin Plating on solder Tail.
- 3.2 Shell: Nickel Plating.

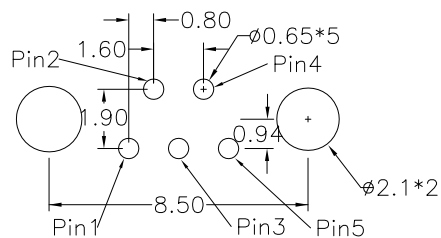

RECOMMENDED PCB LAYOUT

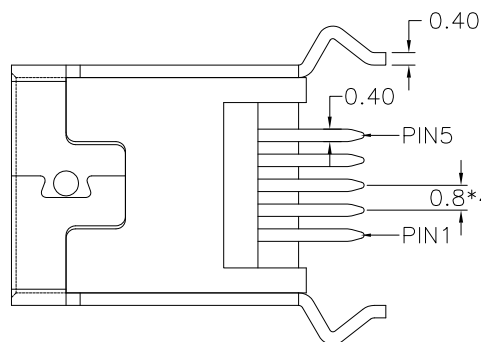

DESCRIPTION(內容):

MINI USB 5pin B 母 - 180° DIP
(RoHS)

PART NO: UMBF-051VXCB-CF1108
(料號)

DWG NO(圖號): AFGYF0002-D-XU-1

DRAWN(製圖):

Gong

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)
.X ±0.3
.XX ±0.2
.XXX ±0.1
ANG. ±1°

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

模具更新,變更圖面尺寸&電氣特性,
變更材質(原:PBT)&料號(原:UMBF-051VXPB-CF1108)

更換確認章

DATE

2010.10.27

2014.10.28

2019.07.29