

A

B

C

D

E

1

1

MATERIALS

HOUSING: LCP (UL 94V-0),COLOR:BLACK

SHELL: COPPER ALLOY/C2680, TIN PLATING

TERMINAL: COPPER ALLOY/C5191, GOLD PLATED OVER ALL
NICKEL UNDER PLATED OVER ALL

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX

DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -25°C~+105°C





2

2




3

3

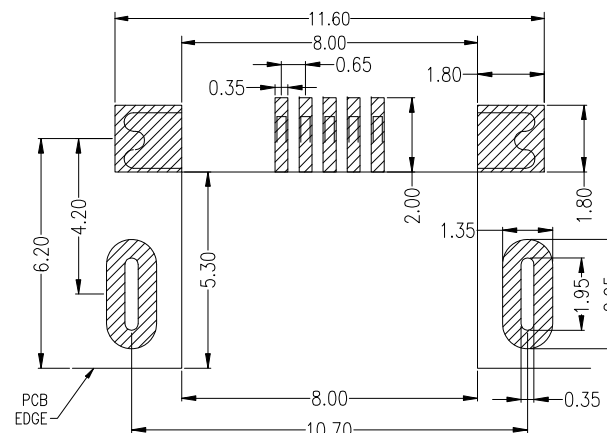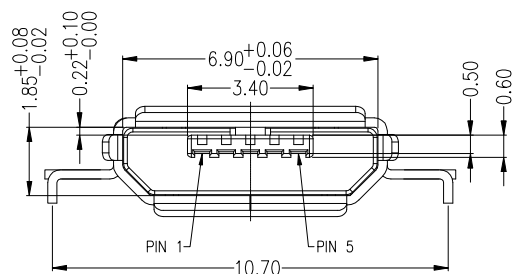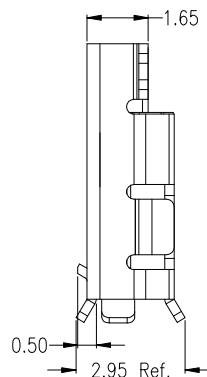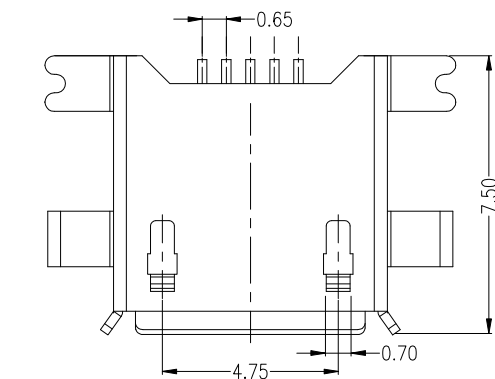

RECOMMEND P. C. B. LAYOUT

PCB圖仅供参考

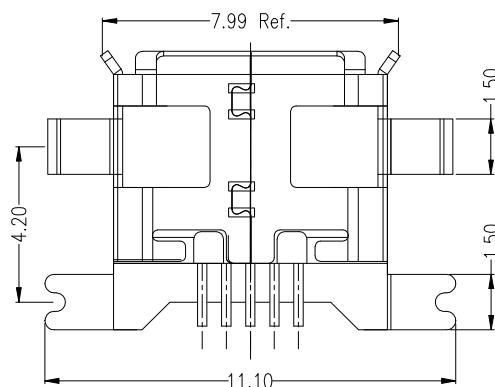

DESCRIPTION(内容):

MICRO USB B TYPE, PCB MOUNT,
SMT,BOARD CUT TYPE, METAL SHIELD,
FEMALE 沉板式 (RoHS)PART NO:
(料 號) UMMBF-051MGC25-CF1066

DWG NO(圖號): 22TCH-051A-1205L

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2017.05.25

A

B

C

D

E