


HOUSING: LCP (UL 94V-0)
SHELL: SUS, NICKEL PLATED
TERMINAL: COPPER ALLOY/C5191,
GOLD PLATED OVER ALL

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

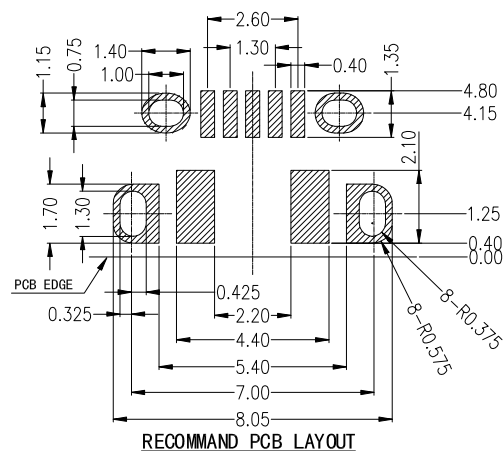

NO.	APPLICATION	TYPICAL WIRING ASSIGNMENT
P1	VBUS	RED
P2	D-	WHITE
P3	D+	GREEN
P4	ID	RA_PLUG-ID
P5	GND	BLACK