

MATERIALS

HOUSING: LCP HI-TEMP. PLASTIC (UL 94V-0)

SHELL: STAINLESS STEEL/SUS304, NICKEL PLATED

TERMINAL: COPPER ALLOY/C5191, GOLD PLATED OVER ALL

SPECIFICATION

CURRENT RATING: 1 AMP MAX

DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX






INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -25°C~+105°C


Part NO.:

UMMBF-051MXCB28-CF1066

G: GOLD FLASH
1:30u" GOLD



NO.	APPLICATION	TYPICAL WIRING ASSIGNMENT
P1	VBUS	RED
P2	D-	WHITE
P3	D+	GREEN
P4	ID	RA_PLUG-ID
P5	GND	BLACK

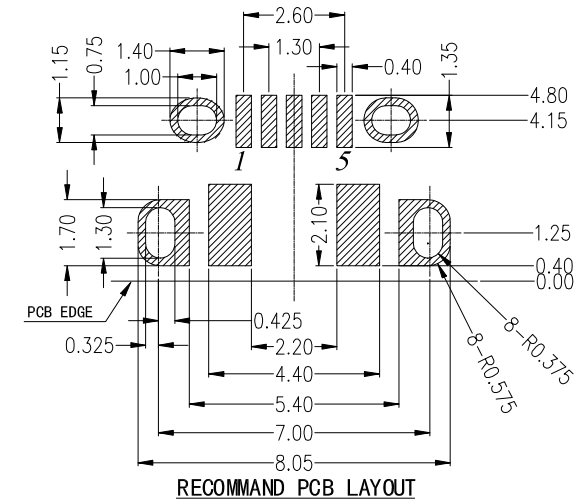

DESCRIPTION(内容):

MICRO USB B TYPE, PCB MOUNT,
SMT+DIP, METAL SHIELD,
FEMALE, WITHOUT POST (RoHS)

PART NO:
(料 號) UMMBF-051MXCB28-CF1066

DWG NO(圖號): 22TAH-05X0-1216L22

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/2

REV

R0

R1

R2

R3

DESCRIPTION

DATE

2017.08.29