
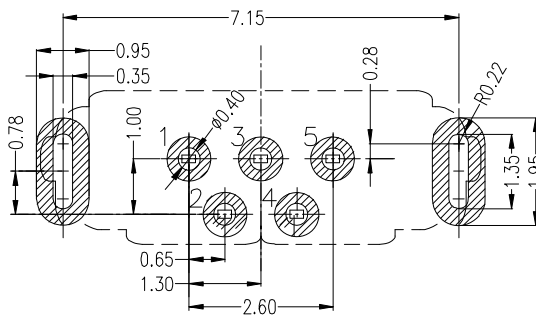
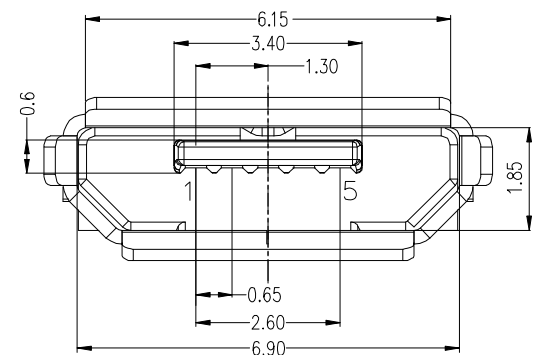
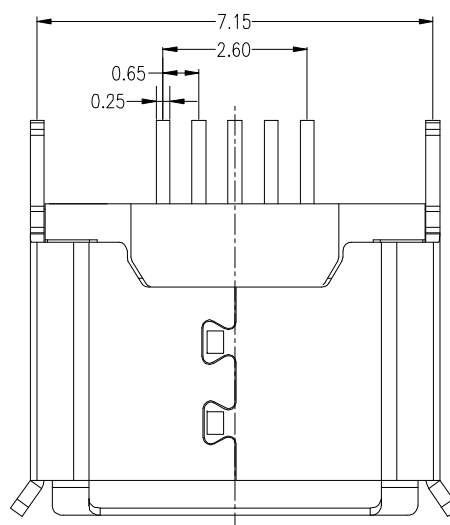
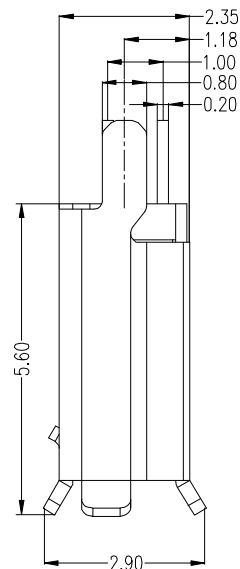


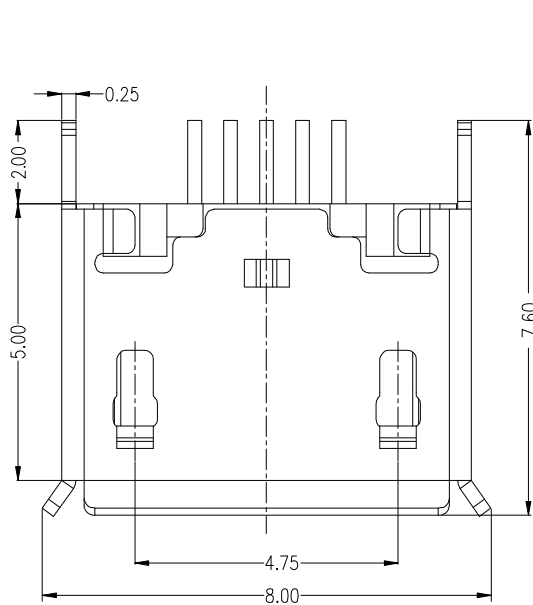

RECOMMENDED P.C.B LAYOUT

MATERIALS

HOUSING: LCP+30% G.F BLACK (UL 94V-0)
SHELL: SUS201, MATTE TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED OVER ALL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 100V
OPERATION TEMPERATURE: -25°C~+105°C



CONTACT NUMBER	SIGNAL NAME
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	ID
PIN 5	GND