

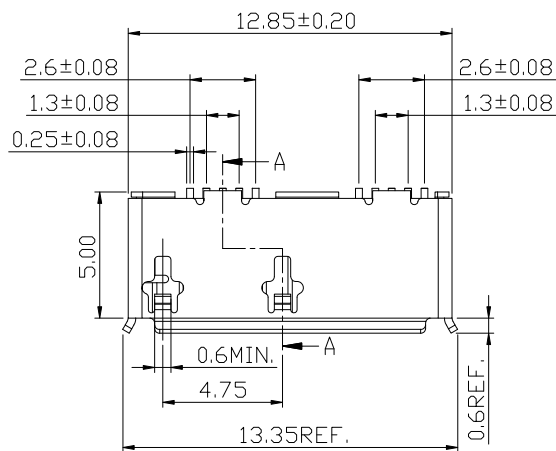
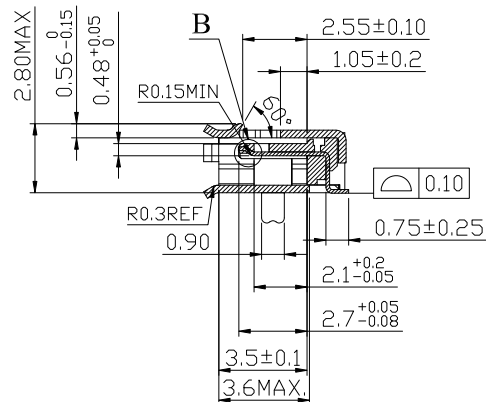


DETAIL B

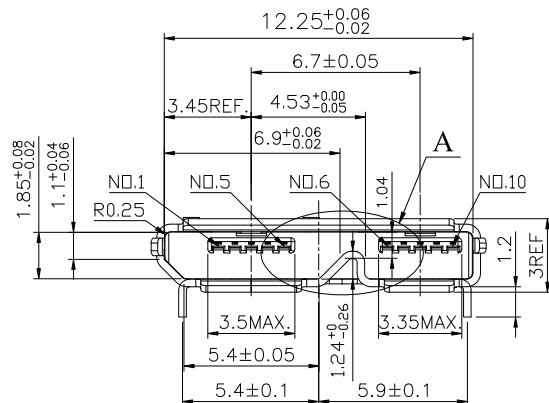

SECTION A-A

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MicB_SSTX-
7	MicB_SSTX+
8	GND_DRAIN
9	MicB_SSRX-
10	MicB_SSRX+
Shell	Shield

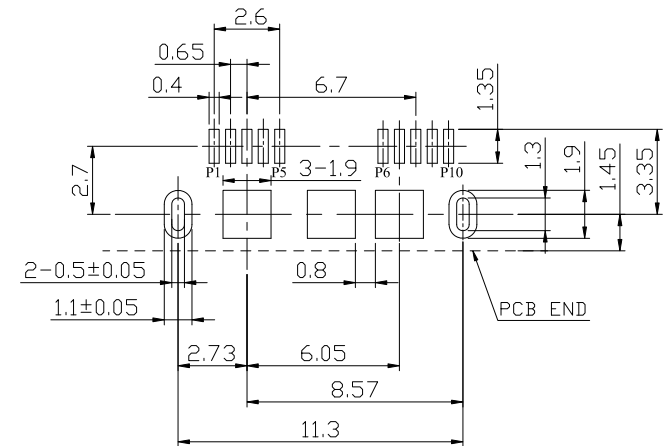

RECOMMENDED PCB LAYOUT



MATERIALS

HOUSING: LCP (UL 94V-0)

SHELL: STAINLESS STEEL, NICKEL PLATING

TERMINAL: COPPER ALLOY, 15u" GOLD PLATED ON CONTACT AREA,
TIN PLATING ON SOLDER TAIL.

SPECIFICATION


CURRENT RATING: 0.5 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX

DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: -25°C ~ +105°C

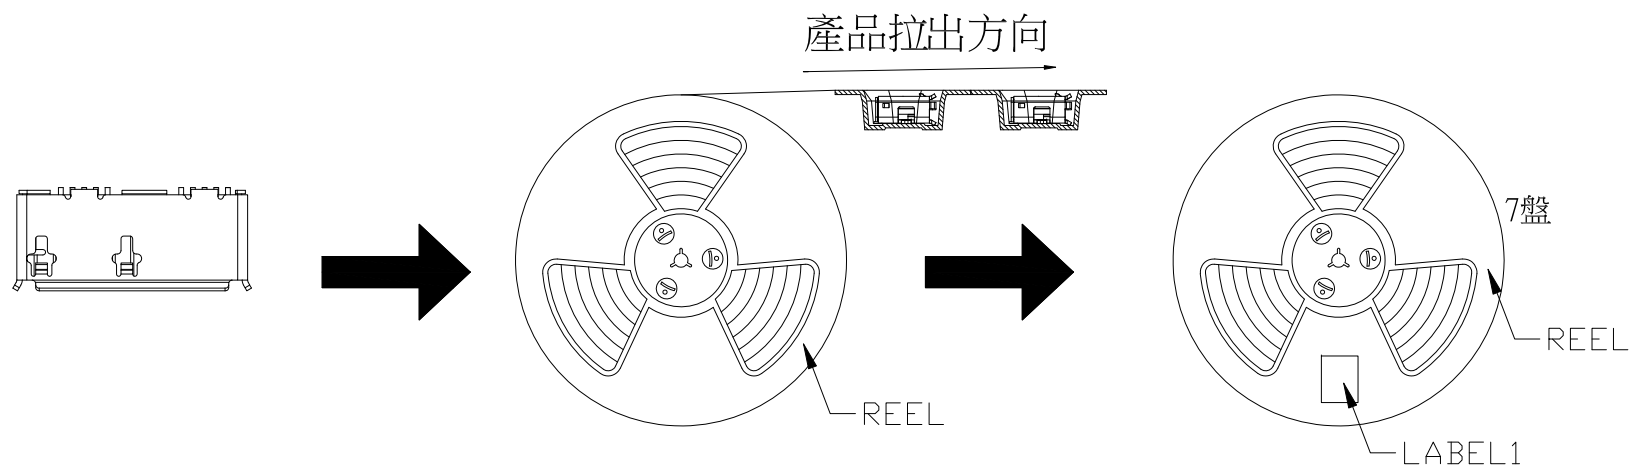

INFORMATION

PER REEL Q'TY: 1500PCS

PER CARTON Q'TY: 7 REEL (10500PCS)

